

9-25-00

4

09/21/00  
Jc997 U.S. PTO

ATTORNEY DOCKET NO.  
064751.0315

PATENT APPLICATION

APPLICATION FOR U.S. PATENT UNDER 37 C.F.R. § 1.53(b)  
TRANSMITTAL FORM

Jc992 U.S. PTO  
09/26/02  
00/12/00

Box Patent Application  
ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of:

Inventor or Application Identifier: William T. Jennings

Entitled: *Multiplication of Modular Numbers*

Enclosed are: X Specification (91 pages)  
X Drawing(s) (19 Sheets Formal)

X Signed combined Declaration and Power of Attorney.

   Information Disclosure Statement (IDS) PTO-1449 with copies of references cited.

X Certificate of Mailing

X Return Receipt Postcard

X The accompanying application claims the benefit of U.S. provisional patent application  
Serial No. 60,155,505 filed September 22, 1999.

X Assignment of the invention to Raytheon Company is attached.

A separate cover sheet in compliance with 37 C.F.R. § 3.28 and § 3.31 is included with  
an Assignment recordal fee of \$40.00 pursuant to 37 C.F.R. § 1.21(h).

Applicant is:

X Large Entity

   Small Entity

   Small Entity Statement enclosed

   Small Entity Statement filed in prior application.

Status still proper and desired.

| FEE CALCULATION    |        |       |                 |          | FEE       |
|--------------------|--------|-------|-----------------|----------|-----------|
|                    | Number |       | Number<br>Extra | Rate     | Basic Fee |
|                    |        |       |                 |          | \$ 690.00 |
| Total Claims:      | 12     | -20 = | 0               | X \$18 = | \$ 0.00   |
| Independent Claims | 3      | - 3 = | 0               | X \$78 = | \$0.00    |
| TOTAL FILING FEE = |        |       |                 |          | \$ 690.00 |

Enclosed is a check in the amount of \$690.00 to satisfy filing fee requirements under 37 C.F.R. § 1.16. Please charge any additional fees or credit any overpayment to Deposit Account No. 02-0384 of BAKER & BOTTS, L.L.P. A duplicate copy of this sheet is enclosed.

Respectfully submitted,

BAKER BOTTS, L.L.P.  
Attorneys for Applicants



Harold E. Meier  
Reg. No. 22,428

Date: September 21, 2000

Correspondence Address:  
Harold E. Meier, Esq.  
Baker Botts L.L.P.  
2001 Ross Avenue  
Dallas, Texas 75201-2980

Tel. (214) 953-6650  
Fax. (214) 661-4650

**MULTIPLICATION OF MODULAR NUMBERS**

RELATED APPLICATION

3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
221

BACKGROUND OF THE INVENTION

The proliferation of public cryptographic systems is a newly emerging phenomena. Only very recently are such systems being considered for widespread acceptance in the public domain. For many years cryptography was viewed as a tool solely for the military, of spies, and of diplomats. It has been the dawning of the information age, which has pushed these systems into the light of day. Indeed, our society is becoming so very dependent on information that the importance of protecting this information has become a vital social need. However, the introduction of cryptographic technology into the commercial or public sector has been met with some skepticism. This has been continuously complicated by various government attempts to control and regulate cryptographic systems for public usage. Indeed, there are numerous problems associated with public use of cryptographic systems. These problems include a wide range of different questions including legal liability issues, economic viability, national security, and even constitutional freedom-of-speech issues. There are direct conflicts that occur between the governmental need to be able to perform information gathering for national security and the need of the private sector to protect information from espionage or sabotage. Classes of cryptographic applications that are centrally related to the overall problem of public use of cryptographic technology include those that are associated with the related subjects of key distribution and key storage and retrieval.

There has been some reluctance in the public sector for the general use of cryptographic systems for day to day office applications. In part, this may be due to the potential risk of losing cryptographic keys resulting in permanent data loss. This results in the storage of keying material that must be carefully safeguarded. Indeed, it can be argued that the keying material may be more important to safeguard than the material the keys are protecting. Key storage cannot reliably depend on human memory, for instance. Unfortunately, if the keys are presumed to be "well-chosen" then the keys are not very easy for a human to conveniently remember. Therefore the keys must be stored somewhere. The keys may be physically stored, such as in a safe. In this case, the keys are stored on removable media, a physical device such as a smart card, or perhaps on paper. Alternatively, the keys may be electronically safeguarded. The keys may be permanently stored in an embedded physical device (such as in the U.S. Government's proposed Clipper chip) or electronically maintained in a secure manner by cryptographic protection methods. The later means that some other key or keys must then be in use by the secure system storing the key material. This secondary set of keys are referred to as Master Keys.

There may also be a large number of keys to manage and store. Keys that are stored electronically must likewise be protected. Consequently, a major concern associated with the storage of keying material is the simple loss of the keying information. Once data has been encrypted using a modern cryptographically secure

cryptographic system, if for any reason the keys are lost, then all data thus encrypted is, for all practical purposes, totally unretrievable. One proposed application for the limited one-way algorithm is the possibility of creating a key retrieval system that permits keys to be reproduced based on a predetermined and controllable cost function.

A fundamental objective of modern cryptography is to construct data encryption systems, which preclude data recovery without possession of privately held keying information. The primary goal of the design of these systems is to insure that recovery of encrypted information without possession of the associated keying information is an intractable problem. The use of cryptography and cryptographic techniques has only started gaining widespread acceptance in the general commercial information industry in the last few years. Outside the banking and financial industries, little use is still made of this technology for the purpose of general information storage and retrieval, especially for day to day operations. There continues to be a reluctance to use encryption except where absolutely necessary. One reason for this reluctance is that data once encrypted cannot be recovered without the keys. Lose the keys and one also loses the information. This, in part, is what motivates the notion of *Key Escrow Systems*.

The term *Key Escrowing* has recently emerged in the literature in reference to systems which are intended to provide the capability for cryptographic key storage and retrieval. These systems are also frequently referred to

as Key Recovery Systems. Considerations for the design of such systems were largely ignored in the literature; that is until controversy arose over government proposals concerning public standards and legislation that would have required the creation of a national system for the mandatory escrowing of cryptographic keys. This would therefore require the creation of a national system of key depositories and the associated infrastructure that would be required. The debate sparked a very emotional dialogue due to the potential that such requirements might have for enormous economic impact, as well as potentially serious social consequences. Government requirements for key escrow stem from the desire of the government to restrain the propagation of strong cryptographic systems or, at a minimum provide a mechanism where the government can retain the ability to break those systems. Concerns for the needs of national defense as well as the needs of law enforcement drive the government requirements. Products containing strong encryption technology are beginning to be marketed on a global basis. The desire of government is to have mechanisms, such as key escrow, incorporated into products in order to enable the breaking of these otherwise unbreakable cryptosystems.

The controversy is that the government requirements for a national Key Escrow system are considered to be very expensive and prohibitively difficult to perform. Due to the sheer size and complexity of such a system, it may be impossible to insure security. The key escrows themselves become tempting targets for exploitation or for terrorist attack.

Key escrow is not simply a government initiative. The notion of key recovery also does have very important commercial applications. Corporations, for instance, have a large economic interest in protecting their  
5 internal information from industrial espionage. It would be preferred that internal company documentation be protected by encryption as a normal course of business. A problem stems from the large number of individuals involved and the transient nature of individual  
10 employment in this society. It may be several years from when data was stored until such time as it is retrieved. Employees may leave the company. Employees may encrypt data and then lose the keys. It may be difficult to identify and associate an employee with the data. In  
15 these circumstances, highly valued information may be permanently lost with serious impact on the corporation or company involved. Therefore, it is important that the cryptographic keying material associated with data archived into permanent storage be retained in a manner  
20 that permits the recovery of that data when needed. This needs to be accomplished in a reliable, yet secure manner.

The basic problem is that the mere existence of a database of keying information presents a fundamental  
25 security concern. The value of the key database itself is equal to that of the data that it protects. Therefore, a key database represents a high priority target for would be attackers. Undetected intrusion is a special concern. Moreover, such a database also  
30 potentially represents a tremendous potential for abuse by properly authorized parties who have access to it.



Anyone who has master key access to the key database may freely read any of the information protected by any of the keys stored therein. Moreover, an otherwise authorized individual with access to this database may  
5 even use the keying information to alter or forge documents without the ability of the original document author to detect the change.

Key Escrow Systems are cryptographic systems used to store cryptographic keying material in a secure manner.  
10 These systems have requirements that are unique from other cryptographic systems. Abuse of access to cryptographic key material by authorized users has been largely ignored and methodologies for dealing with this problem have heretofore not been addressed. One of these  
15 possible methodologies, imposition of a key withdrawal cost function, is now under consideration.

SUMMARY OF THE INVENTION

Key escrow systems comprise a class of cryptographic systems specifically intended for the storage of cryptographic keying information. These systems have requirements unique from other common cryptographic applications and implementation of key escrow systems requires special considerations beyond those of other secure systems. This invention relates to new and unique techniques, which can be applied to systems such as those used for Key escrow. However, these techniques have a wider range of application. The described methodology for modular multiplication has a broad range of applicability in fields including Cryptography, Fault-Tolerant Computation, and Digital Signal Processing (DSP).

This invention relates to an original, modified representation of the Montgomery modular multiplication technique. The described technique results in a recursive loop to reduce the product of two numbers over a modular class. This is then applied to derive a new circuit for the hardware implementation of modular multiplication. This multiplication technique is then applied in the implementation of a proposed algorithm for Key Escrow.

The proposed alternative formulation of the Montgomery algorithm provides the basis for circuit architecture to implement modular multiplication. This is then applied to a class of circuits to multiply numbers within a range of modular classes. Circuits can be constructed to provide a very simple cell structure while taking advantage of existing cells and techniques

for binary multiplication. The techniques described can further be used to accommodate easy changing of the modular base and to permit the multiplication of very large numbers using the circuit in a recursive manner.

- 5 The circuit of the invention can serve as an alternative to existing implementations and has utility in systems such as those used in cryptography or in applications such as DSP where residue arithmetic is of some interest.

- Requirements that distinguish Key Escrow (or Key Recovery) Systems from other cryptographic systems will be described and new techniques for addressing some of these unique requirements are also described. The escrow, or storage of keys in a key database allows for key recovery under prescribed circumstances. There are commercial requirements as well as governmental requirements for such systems. Unfortunately, in many instances, these involve conflicting requirements. This invention attempts to address the issue of access to a key database, and abuse of that access. Requirements of key storage protocols are considered. The concept of imposing a computational cost function for key withdrawal is described and implementation examples are developed.
- 10  
15  
20

- This invention relates to restraining access to key information by the imposition of a computational work function. A computational work cost or delay is described based on the required performance of a large number of simple, measurable operations. This approach to implementing computational delay facilities uses the law of large numbers to draw conclusions on the expected delay. Subsequently, stochastically controllable delay parameters can be derived. The algorithm can be
- 25  
30

implemented in a general purpose computational environment without reliance on specialized hardware.

Results include an analysis of the stochastic performance of the proposed algorithm for implementing a  
5 controlled delay cost function. In the general case, the Chebyshev bound on the delay cost function for the described algorithm is derived. Examples of implementation, using commonly available cryptosystems as a basis, are presented.

10 This application describes aspects for the storage and retrieval of cryptographic keying material. The systems for key management is of central importance to cryptographic applications and to information systems in general. If data is to be stored long term using secure  
15 techniques, then the storage of associated keying material must also be considered. The long-term viability of employing cryptographic techniques in common applications relies in part upon the success of solving the problems associated with the distribution and storage  
20 of the associated keying material.

In accordance with the present invention there is introduced the concept of Limited One-Way Functions, which are used to create computational terms barriers. The invention utilizes functions that are strongly  
25 asymmetric in nature, in terms of work to compute and work to invert. This class of functions, however, is not required to be completely intractable, but alternatively should have some measurable difference in the amount of work required to invert, compared to the cost of  
30 calculation of the output of the function. The application of this invention to key escrowing is

described. A basic algorithm for implementation as an example of a suitable limited one-way function is described. This problem involves randomization and can be viewed as an extension of the puzzling problem  
5 originally developed by R. C. Merkle "Secure Communications Over an Insecure Channel," IEEE Trans. on Information Theory, 1976, IT-22, pages 644-654. The basic algorithm utilized in implementation of the invention requires a randomized response and achieves a  
10 limited, but measurable computational advantage of the data receiver over an eavesdropper. Algorithm performance and application to the implementation of a delay function for employment in key escrow systems is hereinafter explained.

15 Additionally the invention utilizes an enhanced version of the basic delay algorithm. This enhanced algorithm provides more computational advantage and is therefore more practically implemented. The enhancement is in the form of a multi-stage extension, multiplying  
20 the computational advantage. In describing the invention there is outlined the steps involved in the algorithm and provides an analysis of the amount of computational advantage achievable. This advantage can be quantified in terms of number of stages used, as well as the amount  
25 of randomization incorporated at each stage. This advantage, bounded by the complexity of the NP-complete difficult cryptosystems upon which the algorithm is based, can be grown at an exponential rate. A multi-stage algorithm provides additional degrees of freedom  
30 and added computational advantage over the basic algorithm.

Also considered in a description of the invention are required properties of information mixing functions that were specified in the algorithm previously described. These mixing functions serve to break down  
5 information structure prior to each iterative stage of encryption. The mixing functions serve a function that is somewhat analogous to the utility of mixing box functions typical to a classic symmetric encryption cipher. The suitability of several classes of functions  
10 for mixing information between encryption stages are described as related to the invention. The application of symmetric and public key cryptosystems to this purpose is described in one embodiment of the invention.

The preferred embodiment of the invention also  
15 describes an analysis of the stochastic performance of the multistage algorithm. Performance margins are derived through application of the Chebyshev bound. These are stated in terms of probabilities that the work required to reverse the escrowing process will vary from  
20 the expectation by a given amount. As the degree of randomization inherent in the process increases, this variance in performance can be made arbitrarily small.

The invention also relates to a technique for the multiplication of numbers from a modular class. This  
25 technique is based on a modified representation of the described Montgomery multiplication technique. The embodiment of the invention presents background material on techniques for modular multiplication using Montgomery's technique and an alternative formulation of  
30 the technique. This alternative formulation is used to

define a new class of circuits for the multiplication within a modular field of numbers.

In accordance with the invention there is included a description of how RSA and DES can be applied to  
5 implement the multistage algorithm. Implications and limitations of application of these cryptosystems are considered. Additionally, a secure configuration management program is described for an understanding of the invention. A detailed outline of the protocol steps  
10 required to implement such a program is hereinafter described. A description is developed for each of the basic transactions required to create and manage the development and revision of documents controlled within a secure configuration management system.

15 The presented algorithms provide a methodology for restraining access to a Key Escrow database in terms of the delay cost function.

A process for withdrawing an encryption key from escrow, comprising: creating at an originator a set of N  
20 trap door functions each paired with a corresponding token, transmitting the set of N trap door functions to a receiver, randomly selecting at the receiver one of the trap door functions and the paired token, adding randomization information to the corresponding token of  
25 the selected trap door function, encrypting an escrow key with the randomly selected trap door function, transmitting the encrypted key to the originator, and decoding the encrypted key utilizing retained trap door information.

The process for withdrawing an encryption key as set forth above further comprising storing the encrypted key in an escrow database.



BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding to the key escrow system of the present invention may be had by reference to the following detailed description when taken in  
5 conjunction with the accompanying drawings wherein:

FIGURE 1 is an unrolled loop representation of a modified Montgomery multiplier;

FIGURE 2 is a representation of a data dependency graph (DG) of an algorithm for interleaved  
10 multiplication;

FIGURE 3 is a scheduling diagram of an interleaved multiplier;

FIGURE 4 is a circuit diagram of an interleaved multiplier;

FIGURE 5 is a processor assignment map for pairing of multiplication terms in an interleaved modular  
15 multiplier;

FIGURE 6 is a mapping of a dependency graph format applied to processor cells;

FIGURE 7 is a scheduling diagram of a projection of a dependency graph into a signal flow graph;

FIGURE 8 is an illustration of generic processor cell assignment;

FIGURE 9 is a circuit diagram of an interleaved  
25 multiplier utilizing four full adders within a single cell;

FIGURE 10 illustrates an algorithm for concurrent multiplication in a modular multiplier consisting of two concurrent processes;

FIGURE 11 is an illustration of a combined DG graph  
30 concurrent modular multiplication process;

FIGURE 12 illustrates a mapping of reduction DG for reduction circuits;

FIGURE 13 illustrates mapping of DG to SFG for concurrent reduction of circuits;

5       FIGURE 14 is a block diagram of a cell circuit;

FIGURE 15 illustrates a mapping of a projection onto an SFG array of processors;

FIGURE 16 illustrates a scheduling diagram for a cell matrix;

10       FIGURE 17 is a block diagram of serial adder circuit implementation of the cell mapping outlined in FIGURE 16;

FIGURE 18 is a block diagram of a radix 4 implementation of a concurrent reduction cell;

15       FIGURE 19 is an illustration of an RNS multiplier wherein RNS numbers to be multiplied are represented by vector values;

FIGURE 20 is an illustration of the architecture for a recursive multiplier;

20       FIGURE 21 illustrates circuit architecture for modular exponentiation;

FIGURE 22 illustrates a k-stage reduction pipeline for recursive multiplication of large integers;

25       FIGURE 23 is a comparison illustration of the complexity of breaking an underlying cryptosystem with built in front door capabilities;

FIGURE 24 is an illustration of a key escrowing process utilizing a limited one-way function algorithm;

FIGURE 25 is an illustration of a key withdrawal process from a key escrow database;

FIGURE 26 is a block diagram of a multi-stage algorithm for key escrowing in accordance with the present invention; and

FIGURE 27 is a block diagram of a multi-stage  
5 algorithm with a mixing function for encryption key  
escrowing in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Normally, when the problem of key distribution is considered, the interest is in networks of processing or storage elements connected in some manner with communications channels. In some cases, channels used for key distribution are deliberately chosen to be secure, however, the channels of interest are those which are not secure and are thus subject to interception. Channels that might be used by the military or the government for the distribution of keying material would normally be secure (with some possible exceptions). Channels that might be associated with public usage may normally be insecure and hence the transfer of keying information requires a secure protocol. Thus, channels may be broadly categorized into private and public channels. A *public channel* is defined as a communications channel that is freely accessible or a channel whose access is not controlled. A *private channel* is defined as a channel whose intended use is restricted to a specific set of users and thus is privately owned by those users. A private channel may or may not be considered secure. Alternatively, public channels by definition cannot be considered secure. When considering a key distribution system, there is an inclination to think of a communications network or alternatively a computer network. However in general the concept can be extended to cover any type of element (including possibly a human) capable of effecting the transfer of keying information. A traditional secure channel for the delivery of military keying information has been hand delivery by trusted courier. It is

possible to come up with the following categories of channels:

- a) Public,
- b) private - insecure, and
- 5 c) private secure.

Real world systems consist of mixtures of these types of information channels. The information that needs to flow inevitable consists of information that is important to protect and information that is not as  
10 important.

The processing elements may also be categorized. For the sake of convenience, the local processing element of a particular user is referred to as a *client* and those processing elements that are only reached by the user  
15 through a communications channel as a *server*. Each client may seek to protect data from intentional or otherwise examination by any or all of the other clients or other unauthorized users. This is true whether the data is transmitted over an insecure private channel or  
20 over a public channel. This does not apply to the case of a secure channel. A secure channel is one which is protected either by physical or cryptographic means. If the channel is secure then the data is protected because the channel itself is protected. Assuming that data  
25 requiring protection is encrypted in some manner using an encryption function and an encryption key then only the resulting cryptograms are transmitted over an insecure channel. By definition the raw data prior to encryption is referred to as *plaintext* and data that has been  
30 encrypted is referred to as *secure*. Data that is held by the client and not transmitted will be referred to as

local and data that is transmitted without encryption is referred to as *public*. Thus it is desired that all data that a client wishes to protect is transmitted in the secure form.

5       To facilitate private communication between two parties over a communication channel, the transmitter must have an encryption key and the receiver must have a decryption key. In some cases these keys may actually be the same. These cases are referred to as symmetric  
10 cryptosystems. These keys must be a matched pair agreed upon by both of the two parties in some manner and the pair cannot be available to third parties. Thus, there is a requirement for the two parties to share some secret information without disclosure to a third party.

15       It is convenient to physically or logically partition a complete cryptographic system into various domains where information may exist either in a transitory or storage form. Thus such a domain may consist of storage elements, channels, or processing  
20 elements. Assuming for the time being that this information is successfully shared, there are three domains related to this problem. Domain 1 is the region within the transmitter where the data is in plaintext form awaiting encryption. Domain 2 is the domain where  
25 the data is only found in secure form. This includes the transmission channel from the transmitter to the receiver. Thus the data crosses from Domain 1 to Domain 2 prior to transmission on the channel. Finally, Domain 3 is the region within the receiver where the decryption  
30 key has been applied to convert the data back to plaintext. Note that it is necessary for the transmitter

to provide security for Domain 1 and it is necessary for the receiver to provide security for Domain 3. A complex communication network is normally made up of many such receiver/transmitter pairs. Each, in general, requires  
5 an independent set of encryption/decryption keys.

Data that is to be protected must have the encryption key applied to it as it transitions from Domain 1 to Domain 2. This also indicates that users or other possible observers must not be able to gain  
10 physical or electronic access to Domain 1 because in this domain all of the information is in plaintext form and is easily readable. It shall be assumed that a protected domain such as required here is establishable.

In general there are two basic approaches to provide  
15 cryptographic security, informational and computational. Informational security is provided by a system when there is insufficient information available to construct the plaintext without the keying information irrespective of the amount of computational power applied. The classic  
20 example of an informational security system is Vernam's One-Time Pad. Computational security is based on the notion that the decryption process is computationally intractable without possession of the decryption keys. Most practical cryptographic systems are based on  
25 computational security.

When referring to computational security, relative security can be judged in terms of the economic cost as a function of the amount of work (or time) involved in breaking of the cipher. This cost function can be  
30 measured by the number of operations required to break the algorithm in an efficient manner. The subject area

of complexity theory deals in part with just how difficult problems (such as these) are to solve, at least in the worst case. While it is often not difficult to get upper bounds on the complexity of solving problems, it is another matter, altogether, to get a meaningful lower bounds. This is especially true because classes of problems that are extremely difficult to solve for many instances will have certain values or subsets, which are easily solved. Thus, while the algorithm may be generally strong, there are poor choices, which provide avenues for easy exploitation. For most classes of problems of interest in cryptographic applications there are not provable well defined lower bounds. This is a recognized weakness especially of public key algorithms based on discrete mathematical functions.

The methodology of the present invention uses characteristics of public keys systems, applied to a newly proposed generalization to a work originally done by R.C. Merkle in a 1978 paper. The present invention utilizes a cryptographic algorithm intended to provide a robust back door path, while affording a novel "front-door" path for controlled access. A randomization technique generalizing Merkle's idea is used to provide a parameterized amount of work to go through the front door. By making use of a large amount of randomization,  $O(N^k)$ , the law of large numbers can be applied to the solution algorithm to require an average amount of work per solution, rather than relying on a perhaps unknown lower bounds on one problem solution. At the same time, a reasonable amount of work,  $O(N)$ , is required to normally communicate the keying information. The result



is the generation of a candidate function for a limited one-way function, one that provides an asymmetric transfer cost function in both directions.

By controlling both parameters  $N$  and  $k$  and the size  
5 of the randomized encryption problem, the amount of work required to break or retrieve the cryptogram through the front door path is controllable. Thus, the price can be specified within certain bounds for breaking the cryptogram and hence solving the problem of escrow key  
10 retrieval in a manner to match given bandwidth requirements. What will be described is a cryptographic system whose access cost is easily controllable and can range in difficulty from the simple to prohibitively difficult by adjusting the defining parameters of the  
15 algorithm. This can serve as an effective basis for the construction of Key Escrowing systems that afford varying degrees of data access and retrievability. This ability can be afforded to different classes of users while maintaining cryptographic security against unauthorized  
20 access. The system of an embodiment of the invention effectively provides practical limitations that preclude systematic patterns of abuse by otherwise authorized agents or clients. This technique is applied to the problem of public key escrowing systems or Mandatory Key  
25 Escrowing (MKE) systems.

A Key Escrowing system refers to a component of a large, distributed data management or communication system, which is used to store cryptographic keying material, in a controlled manner for later retrieval.  
30 Commonly the term is used to refer to systems that are

designed to permit third party access to keying information under controlled circumstances.

5 A Key Escrowing system is fundamentally different from cryptographic systems based on zero-knowledge techniques such as some password or authentication systems. A Key Escrowing system must provide a withdrawal capability rather than simply verification. A Key Escrowing facility, agency, or bank is responsible for the cataloging of all deposited keys. Keys that are  
10 stored by the escrowing agency are referred to as *deposits* and can use the term *account* to refer to the set or collection of deposits associated with a particular device or client. The ability to be able to associate deposits is required to cover possibilities where a  
15 particular client requires multiple keys or replacement keys. Unlike many other commodities associated with economic value, keys may be freely replicated and yet each copy retains the same economic value as the others. Once duplicated, all copies must be equally protected.  
20 The security of any and all copies of a key is that of the most weakly protected. This concept is very important when considering the security of a key bank. The value of the keys stored therein is equal to the sum of all the distributed keys. Thus for any kind of a  
25 national escrowing system, the potential economic value of such a bank would be truly enormous.

There are limited opportunities to impose restraint on abuse of access to a key escrow database. These include:

- 30 • spreading the key information across multiple authorities or agencies,

- escrowing only part of the key information,
- protocol or procedural measures,
- machine or hardware imposed limitations,
- time limitations on useful life of keys,
- impose cost barriers on key withdrawal.

The last of these is specifically addressed by the present invention.

It is apparent that, for such a system, what is required is a self-limiting or self-regulating algorithm to preclude the potential for wholesale abuse. Since keys are very frequently created (deposited), but rarely withdrawn, there is an inherent asymmetry to the problem. If it is as easy to withdraw keys as it is to deposit them, then there is every possibility that keys may be withdrawn at an unreasonably excessive rate. It is therefore desirable to have a system that inherently limits the rate of withdrawals to a pre-defined maximum rate. This provides an inherent deterrent against a specific threat profile, that of the "casual key browser."

The most likely scenario for abuse lies in the realm of directed assaults where a specific account is targeted for access by improperly authorized parties. However, perhaps a greater threat is that the properly authorized parties will abuse their power in some wholesale manner. This is one important aspect of the key escrowing problem. A security threat concentrated and directed at specific individuals is a difficult problem to deal with but can be addressed by way of escrowing protocols and audit trails. However, a separate and perhaps greater danger to individual freedom is the anonymous and random

monitoring of citizens without probable cause or due process of law.

A technical advantage of the present invention is the feature of a specific cost associated with each key withdrawal from a Key Escrowing depository. This then means that one may not simply randomly browse, without penalty, among what is in principle a very large data base of keys, but must in general request specific keys to be withdrawn. The described embodiment is a limited one way function applied within a key escrow system to implement a cost of withdrawal function. The computational cost of key withdrawal greatly exceeds the cost of deposit. Although this may not, in of itself, prohibit an authorized individual from asking for additional keys. However, the numbers would be inherently self-limiting. Additionally, any continuing pattern of such behavior would be statistically detectable, since the cost (on average) for systematically requesting additional keying information would be detectable.

Traditional electronic approaches to the storage of vital key information have normally involved keeping copies of keys in a trusted database, protected by one or more master keys. This master key is therefore more valuable than the other keys and is at least as important as the sum of all of the protected keys. Consequently, anyone in possession of a master key would be afforded complete and unlimited access to all of the information protected by all of the sibling keys stored using the master key. The advantage of having a master key is that there is only one key of which to keep track. The chief

disadvantage is that a master key constitutes a single point defense. Compromise of a such a master key is therefore very critical. A single key database can be compromised by anyone in possession of the master key material.

It is therefore desirable to segregate data into multiple master key domains. This of course has the undesirable property of multiplying the number of master keys which must be safeguarded or protected in of themselves. Ultimately these keys are protected in much the same manner as a single master.

There have been suggestions that solve this problem by using secret splitting techniques to provide complementary components for each key stored. These complementary components would have to be put together to recover the original key. Components would be separated at time of creation and stored with alternate "trusted" agencies. These techniques not only offers protection from external attack on the database but also some protection from abuse from within a particular trusted agency. These systems are inadequate in that they do not address concerns over the possibility of collusion between individuals within the agencies with access to the databases. It is recommended that additional measures are necessary to discourage abuse of the system and to provide additional opportunities for oversight.

Integer arithmetic operations in prime modular fields are of great interest in a variety of fields. Modular multiplication is of central importance to technologies such as cryptography, Digital Signal Processing (DSP), and fault-tolerant computing.

In cryptography, the multiplication and exponentiation of large integers is fundamental to the implementation of many cryptographic algorithms. For example, public key cryptosystems such as the popular RSA cryptosystem are based on the operation of exponentiation and the corresponding intractability of computing discrete logarithms in a large finite field. Performance demands on encryption systems are constantly increasing, resulting in a growth in key sizes required to maintain security. Indeed, it is increasingly evident that cryptographic key sizes are required that exceed five hundred bits. Calculations based on these key sizes must be performed in an economic manner. Recent results indicate that RSA key sizes of five hundred bits are now vulnerable. Many cryptographic applications are implemented in software. However, it is now the case that hardware implementations are of interest for higher performance and greater throughput. It is desirable, for example, to provide strong encryption in real time for applications such as telecommunications. Performance issues are of primary concern in these applications.

Applied to residue number systems, modular multiplication over finite fields is important in areas such as Digital Signal Processing (DSP) and fault tolerant processing. A primary interest is to perform large bit-size multiplications very quickly. Residue numbers attract interest due to the absence of carry propagates from digit to digit within the residue number system. Residue number systems also allow for easy implementation of redundant representations of numbers in

an efficient manner. This facilitates the implementation of fault tolerant systems.

It is important to develop temporally and spatially economic implementations. One computationally efficient technique for the implementation of modular multiplication was first outlined by Peter Montgomery in 1985. Since that time, there have been a variety of both software and hardware implementations of modular multiplication using Montgomery's idea. While Montgomery's technique is not the only method available for implementation of modular multiplication, it is very efficient. It is also utilitarian in that it provides an elegant method for transforming the multiplication problem from the prime field, where the calculation is difficult to perform in hardware, to a binary field, where it is more easily accomplished.

Montgomery's technique provides a convenient conversion from a residue class modulo  $N$  to a larger class modulo  $R$ , where  $R$  is co-prime to  $N$ . Additionally,  $R$  is chosen to be a field such that the operation of multiplication is easy to accomplish, whether in hardware or software. It is consequently convenient to select this field to be a binary field and therefore  $R = 2^r$ , where  $r$  is the number of bits in  $R$ . Thus, if  $N$  is prime or the product of primes (not including the number 2), this satisfies the co-prime requirement. To perform the conversion requires defining two parameters,  $N_c$  and  $R^{-1}$ , such that the following relationships hold:

$$\begin{aligned} 0 < R^{-1} < N, \\ 0 < N_c < R, \end{aligned}$$

and

$$RR^{-1} - NN_c = 1.$$

Conversion from an integer,  $x$ , to a  $N$ -Residue number involves computing  $xR \bmod N$ . Conversion back to an integer requires multiplication by  $R^{-1} \bmod N$ . The key to Montgomery's technique is a reduction algorithm that allows efficient computation of a number  $xR^{-1} \bmod N$  from  $x$ . The reduction algorithm, as stated by Montgomery, is given by:

```
function Reduct (X R, N, Nc)
begin
  m:= ((X mod R)*Nc)mod R ;
  x:=(X + m * N)/R;
  if x > N then x:=x - N ; end if;
  return x;
end Reduct;
```

The choice of  $R$  as a binary field greatly simplifies several algorithm steps. In the first step of the operation, it is necessary to perform two modulus operations with respect to  $R$ . With  $R$  being a binary field, the modulus operation consists simply of discarding all but the  $r$  least significant bits. In the second step, a division by  $R$  is required. Since  $R$  is a power of two, the operation of division simplifies to the discarding of the  $r$  least significant bits of the argument. This results in a highly efficient realization in hardware. Consequently, the algorithm reduces to a small number of simple operations that lend themselves readily to direct translation into hardware.

The number transformation from the residue number system to the binary system (and back) can be accommodated in one of several manners. It is possible, for instance, to directly compute  $xR \bmod N$  from the



integer  $x$  by multiplying by the constant  $R$  and then doing the modular reduction. Alternatively, the same result can be arrived at by computing  $\text{Reduct } ((x \bmod N)(R^2 \bmod N))$  which turns out to be more efficient. The application of  
5 this technique precludes the necessity of directly computing the modular reduction.

Note that in Montgomery's original work, the conversion to the residue system is achieved as previously described. This involves pre-multiplication  
10 by  $R^2 \bmod N$ . It is possible, however, to forego the pre-multiplication, and instead to post-multiply by  $R^2 \bmod N$ , followed by another application of the reduction algorithm, or to even consider leaving the number in the  $R$ -Residue form. The later method is an approach  
15 frequently taken in practical implementations of the technique. When discussing implementation of the algorithm it is necessary to consider which approach is assumed.

To perform multiplication, the reduction algorithm  
20 is applied directly to the product of two numbers,  $A$  and  $B$ . Application of the reduction algorithm, as described above, has the effect of removing a factor of  $1/R$  from the input to the algorithm. When converting back, a post-multiplication by  $R^2 \bmod N$  is required, followed by  
25 another round of reduction which reduces the size of the result again and removes the second factor of  $R$ . The term,  $R^2 \bmod N$ , can be a pre-computed constant. It is normally considered not to be cost effective to convert each result back to the original number system, but  
30 rather to perform a number of operations (such as in exponentiation) prior to conversion. There is motivation

to leave the final result in the  $N$ -Residue system whenever practical. This avoids the back-conversion cost.

The previous description outlined the basic approach to applying the Montgomery technique for the derivation of interleaved multipliers. Instead of calculating the  $N$ -Residue  $xR \bmod N$ , and then decomposing  $R$  into individual digit operations, consider the following transform,  $xR^k \bmod N$ . The instance where  $k = 2n$  was initially described, this procedure is referred to as the Modified Montgomery Algorithm and outlines the procedure to perform exponentiation. The more general theory that lies behind these results is described as part of the statement of the invention and will subsequently describe methodologies to derive a class of concurrent modular multiplication circuits. These details include a generalized circuit of the algorithm. An alternate embodiment for the  $k = 2$  case (binary digit operation case) is contrasted to other comparable existing implementations.

Using algorithm Reduct as before, these results  $\text{Reduct}((x \bmod N)(R^{k+1} \bmod N)) = xR^k \bmod N$ . Previously, in the description of the basic Montgomery Technique, it was required that:

$R > N$ ,

If  $R < N$  is chosen instead, then the outcome of the reduction operation would not be reduced to the range  $-N < x < N$ . Choosing  $R < N$ , the algorithm may be applied multiple times in an attempt to reduce the outcome down to the proper range. It is indeed possible to reduce the result to the desired range by recursive application of

the reduction algorithm. Each application of the reduction algorithm introduces a factor of  $R^{-1}$ . If recursive application of the algorithm requires  $k$  rounds of reduction, meaning that the reduction algorithm is applied  $k$  times, then to transform back to the original integer number system now requires multiplication by  $R^k \bmod N$ .

This formulation appears similar to the approach of taking the residue  $R$  and decomposing into  $k$  digits of size  $r$  so that  $r^k = R$ . However, there is a difference in the implementation. The common practice of subdivision of  $R$  into digits facilitates the interleaving of the addition and multiplication steps. The definition in the original Montgomery Algorithm assumed a value of  $R$  greater than the modulus,  $N$ . Relaxation of this constraint and recursive application of the reduction algorithm permits derivation of a result analogous to that of the digit decomposition approach. If the reduction algorithm is applied once, the resultant output of the reduction operation is not reduced down to the range  $-N < x < N$ . To further reduce the result, the algorithm can be applied recursively. Consequently, it is possible to reduce the outcome to the proper range by recursive application of the reduction algorithm. Each application of the reduction algorithm reduces the range of the outcome by a factor of  $1/R$ . The number of times that the algorithm must be applied recursively is determined by the size of  $R$  relative to the size of  $N$ . Each application of the reduction block removes a factor of  $1/R$  from the result. It is therefore necessary to either pre-multiply or post-multiply by a factor of  $R^{k+1}$ ,

where  $k$  is the number of rounds of reduction required. While functionally similar to the decomposition into digit operations, this recursive process implies an alternate sequence of operations. The resulting

5 recursive loop is described as:

```

function RecursiveReduct( X, R, N, Nc)
for i in 0 to k-1 loop
    X0:= ((X mod R) * Nc) mod R;
    X:=(X+X0*N)/R;
10    if X > N then X:= X - N ; end if;
end loop;
return X;
```

This procedure therefore describes the general format for the Modified Montgomery Multiplication  
15 algorithm, expressed as a recursive loop. A block diagram showing the unrolled loop is depicted in FIGURE 1.

In the modified algorithm, the transform is performed to a field of size  $R_k$  rather than  $R$ , while  
20 still performing operations modulus  $R$ . Consider the following derivation for the multiplier, let the two inputs to the multiplier 10 be  $a$  and  $b$ . To convert to an  $R$ -Residue number, perform the transform

$$a'R = R^k a + (((R^k a \bmod R) N_c) \bmod R) N.$$

25 Therefore

$$a'R \equiv R^k a \bmod N.$$

Multiply both sides of this expression through by  $R^{-1} \bmod N$ . By definition,  $R^{-1} R \bmod N = 1$ . Subsequently:

$$a' \equiv R^{k-1} a \bmod N.$$

30 Multiplying  $a'$  by  $b$  together, a value is determined to use for the inverse transform to convert the result in the  $R$ -Residue number space back to integer form. First, the product is obtained,

35

$$c = a'b = R^{k-1} ab \bmod N .$$

The inverse transform can be defined as

$$z = \text{REDUCT}(R^{k-1} R^m ab) .$$

Therefore

5 
$$zR \equiv R^{k-1} R^m ab \bmod N .$$

Alternatively,

$$z \equiv R^{k-m-2} ab \bmod N .$$

Therefore, the following relationship is obtained for the coefficient  $m$ :

10 
$$m = k-2 .$$

The special case of  $k = 2$  results in a value of  $m = 0$  and corresponds to Montgomery's original result.

The advantage of the application of higher order terms to Montgomery's multiplier techniques is that it conveniently enables the use of values for  $R$  that are in fact smaller than the size of  $N$ . Individual operations are performed in the smaller field. First, apply  
15 Montgomery's reduction algorithm as before, however, now let the input be of the form,  $X(R^k \bmod N)$ . Thus, to calculate the result of  $\text{Reduct}(X(R^k \bmod N))$  and following the previous notation, the intermediate terms are:

20 
$$m = (X * (R^k \bmod N) \bmod R) * N' \bmod R ,$$
  
and

$$t = (X(R^k \bmod N) + mN) / R .$$

25 These intermediate values are both well defined for all values of  $R$ . If  $R < N$ , however, the Reduct algorithm does not reduce the output,  $t$ , to the range  $0 < t < 2N$ . However, if the initial multiplier is a higher order power of  $R$ , a secondary application of the Reduct  
30 algorithm is applied following the multiplier, recursively. Each recursion, in effect, removes one

power of  $R$ . If the power of  $R$  (and hence the degree of recursion) is chosen appropriately, then recursive application of the algorithm a corresponding number of times will result in reduction of the number to the appropriate range. This permits the number of bits in the field defined by the number  $R$  to be reduced.

It is possible to view the Montgomery algorithm in terms of a combination of the multiplication and reduction operations into one combined operation. To apply Montgomery's  $R$ -Residue idea to the problem of multiplication, consider the multiplication of two  $n$ -bit numbers  $A$  and  $B$ , where the corresponding integers  $A, B \in \{0, 1, 2, \dots, N-1\}$ . Let  $X = A*B$ . The function REDUCT( $X$ ) is therefore computed by:

```

15     function Reduct ( $A*B, R, N, N_c$ )
        begin
             $m := ((A*B \bmod R) * N_c) \bmod R$  ;
             $X := (A*B + m) / R$  ;
            if  $X > N$  then  $X := X - N$  ; end if;
20     return  $X$ ;
        end Reduct;
```

The principle behind the interleaved approach is to combine, at the single digit level, the operations of the reduction function, and the multiplication. This function can be re-written as a series of bit operations. The numbers  $A$  and  $B$  are both modulo  $N$  numbers and hence require  $n$  binary bits. Writing  $B$  as the binary sequence

$$B = \sum_{i=0}^{n-1} B_i 2^i,$$

the multiplication of  $A$  and  $B$  can be written as

$$AB = A \sum_{i=0}^{n-1} B_i 2^i.$$

The product, without reduction, requires  $2n$  bits. The quantity  $\mathbf{AB}$  mod  $R$ , however, requires only the least significant  $r$  bits.

The term  $\mathbf{m} \cdot \mathbf{N}$  from the Reduct function is written  
5 similarly as

$$\mathbf{mN} = \mathbf{m} \sum_{i=0}^{n-1} \mathbf{N}_i 2^i.$$

Calculating the term,  $\mathbf{X} = \mathbf{AB} + \mathbf{mN}$  from the reduction algorithm described above, there is obtained:

$$\mathbf{X} = \mathbf{A} \sum_{i=0}^{n-1} \mathbf{B}_k 2^k + \mathbf{m} \sum_{i=0}^{n-1} \mathbf{N}_i 2^i = \sum_{i=0}^{n-1} (\mathbf{AB}_k 2^k + \mathbf{mN}_i 2^i).$$

10 These relationships can be inserted into the Reduct algorithm above, and then used to develop the following recursive, digit level representation of the algorithm.

```

function ModMul (A, B, N)
X := 0;
15 for i in 0 to n - 1 loop
    m := X0 ; c := 0;
    for j in 0 to n - 1 loop
        Xj := (Xj + m * Nj + Ai Bj + c) mod 2;
        c := (Xj + m * Nj + Ai Bj + c) div 2;
20    end loop;
    X := X/2;
end loop;
if X > N then X := X - N ; end if;
return X;
25 end Reduct;
```

In this algorithm, the bit vector  $X$  is used for local term storage. The numbers  $X$  and  $N$  are implemented as  $r$ -bit vectors, since all operations with them are performed in the field  $R$ . A carry propagate term,  $c$ ,  
30 represents the inter-loop propagate between increasing weighted power terms. The variable  $m$  in this algorithm is used to hold the value of the least significant bit of

X. This value is multiplied across the entire row of bits and therefore needs to be saved since  $X_0$  is overwritten.

This algorithm can be viewed in terms of its  
5 representation by a data Dependency Graph (DG) as depicted in FIGURE 2. This diagram depicts a time independent representation of the flow of information within the system. This DG represents one possible method for the interrelationship of input to output  
10 information in the form of a specific algorithm. Therefore, the portrayed DG represents one possible realization for performing the modular multiplication algorithm. This particular representation illustrates cells 12 where all the connections are related locally.  
15 In this case, all connections between cells are nearest neighbor connections and there are no globally bussed signals.

For the DG illustrated in FIGURE 2, the input to output transfer relationships can be written for a  
20 generic multiplier cell as:

$$\begin{aligned}X_{out} &= (X_{in} + x_j * n_i + a_i * b_j + t_{in}) \bmod 2, \\C_{out} &= (X_{in} + x_j * n_i + a_i * b_j + t_{in}) \text{div } 2, \\x_j &= X_{in} \bmod 2, \\a_{out} &= a_{in}, \\25 \quad b_{out} &= b_{in} \\n_{out} &= n_{in}\end{aligned}$$

Due to the regularity of the array of operations, the DG can be projected onto a linear systolic array circuit realization. This is further illustrated in the  
30 form of a signal flow graph connecting this array of processor elements. FIGURE 2 portrays one specific



projection from the DG onto a Signal Flow Graph (SFG). By mapping the DG onto a set of processing circuit elements, a hardware implementation of the algorithm can then be realized. Once mapped, it is then possible to  
5 make a determination of a schedule (time sequence) projection for the DG as shown in FIGURE 3. The schedule projection describes the operations or occupancy of cells 14 in time. The simplest assignment of DG cells to physical cells is simply to assign the cells from a two  
10 dimensional dependency array projected onto a linear array of physical computational cells. The corresponding circuit realization obtained is depicted FIGURE 4.

It is possible to consider other mappings and the corresponding circuits that result from these mappings.  
15 An alternative implementation, based on the same DG mapping, maps two groups of DG cells such that two product terms of equal weight are added within one processing element of a systolic array. The described schema for the pairing of multiplication terms is shown  
20 in FIGURE 5. For comparison to the previous implementation, this method is illustrated in DG form by reference to FIGURE 6. This leads directly to the schedule diagram of operations shown in FIGURE 7 where the DG individual processing cells 16 are highlighted.  
25 Each highlighted rectangle represents one cell of a systolic array at a specific time. Inspecting the figure in detail, it can be seen that a specific cell is repeated right to left (representing time intervals). Individual cells in the graph are instantiated  
30 sequentially from top to bottom.

Once these assignments are made, then it is possible to construct the circuit realization. Changing from the absolute DG cell coordinate system of FIGURE 6 to a coordinate system relative to processor ID and time, the  
5 result is the general processor cell 18 depicted in FIGURE 8. The circuit realization of this cell, as shown in FIGURE 9, is then implemented using four full adders within the single cell. All cell-to-cell terms are registered and hence do not require globally bussed  
10 signals.

Instead of calculating the  $N$ -Residue  $xR \bmod N$ , and then decomposing  $R$  into individual digit operations, consider the following transform,  $xR^k \bmod N$ .

As before, using algorithm Reduct, the result is  
15  $\text{Reduct}((x \bmod N)(R^{k+1} \bmod N)) = xR^k \bmod N$ . Previously it was required that  $R > N$ . As an alternative, chose  $R < N$ , then the outcome of the reduction operation would not be reduced to the range  $-N < x < N$ . As described for the Modified Montgomery approach, the algorithm can be  
20 applied multiple times in order to reduce the outcome down to the proper range. Each application of the reduction algorithm reduces the range of the outcome by a factor of  $1/R$ . Subsequently, the number of times that the algorithm must be recursively applied is determined  
25 by the size of  $R$  relative to the size of  $N$ . Since each application of the reduction block removes a factor of  $1/R$  from the result, it is necessary to either pre-multiply or post-multiply by a factor of  $R^{k+1}$ , where  $k$  is the number of rounds of reduction required.

30 To transform back to the original number space requires multiplication by a factor of  $R^k \bmod N$ , hence it

is normally the practice to do a number of operations in the residue system prior to conversion back to the original integer representation. If recursive application of the algorithm requires  $k$  rounds of  
5 reduction, meaning the application of the reduction algorithm  $k$  times, then to transform back to the original integer number system requires multiplication by  $R^k \bmod N$ . Note that in this definition,  $k$  does not represent the digit size. Choosing  $R < N$  implies that the field  
10 transformation maps  $N$  into a smaller field, in which case, the representation of numbers from  $N$  would not be unique. It is consequently necessary to consider the transform to be into the field  $R^k$  which is larger than  $N$ .

This formulation appears similar to the commonly  
15 used approach of taking the residue  $R$  and subdividing it into  $k$  digits of size  $r$  so that  $r^k = R$ . However, there is a difference in the implementation. While functionally similar, this process results in a difference sequence of operations. This algorithm is thus as depicted in FIGURE  
20 10.

The common practice of subdivision of  $R$  into digits allows the interleaving on the addition and multiplication steps. This can be used as the generator of a stochastic array such as described by relaxation of  
25 the constraint that  $R$  is chosen to be greater than  $N$ , and recursive application of the algorithm to derive a result very analogous to that of the digit decomposition approach. This approach to the formulation of the modular multiplication operation separates the  
30 multiplication and reduction operations into sequential, concurrent operations. The multiplication step is

performed using basic binary multiplication operations and the results are fed sequentially, starting with the least significant terms into the reduction circuit. This operation continues while the higher order terms of the binary product continue to be calculated and reduced. FIGURE 11 illustrates a combined DG for the concurrent modular multiplication process. As can be seen from this there is a clear partition between the multiplication and reduction stages and that also information flows from the multiplier sequentially into the reduction stage.

The input to output transfer relationships for the generic DG cell are subsequently given by:

$$X_{out} = (X_{in} + X_j * n_k + C_{in}) \bmod 2,$$

$$C_{out} = (X_{in} + X_j * n_k + C_{in}) \div 2,$$

$$X_j = X_{in} \bmod 2,$$

$$n_{out} = n_{in}.$$

Focusing on the reduction stage, FIGURE 12 illustrates a mapping of the reduction DG into a SFG. The DG cells are projected in the direction in which the bits of the modulus  $N$  are constant. This projection maps a single column of DG cells onto a linear array of cells in a SFG. Each cell represents one bit operation of the reduction algorithm. Carry terms propagate in the direction orthogonal to the direction of the mapping projection and opposite to the direction in which the results propagate. The  $x_i$  terms from the algorithm are common across the cells and are propagated in the same direction as the carry terms (opposite the direction in which the results propagate). This assignment of cells dictates the most efficient scheduling of operations in time. The schedule for this

projection is illustrated in the scheduling diagram shown in FIGURE 13.

As can be seen from FIGURE 13, the resulting schedule is very analogous to that depicted in FIGURE 3 because of the inherent symmetries in the two algorithms. The cell organizations and projections are substantially identical while the actual cell operations are quite different. Combining the cell mapping from FIGURE 12 and the schedule from FIGURE 13, then there is derived the cell circuit implementation, which is then depicted in FIGURE 14. From FIGURE 14, it can be seen that each cell is of low complexity. Each cell 24 of this implementation consists of one full adder 28, registers 30, a buffer 29, and associated logic 26.

To compare the results of the techniques described to the earlier results, it is informative to compare the resulting mapping into a corresponding DG map for the binary radix case. This map is depicted in FIGURE 15 which also portrays a projection onto a SFG array of processors. As can be clearly seen from this diagram, the projection space is orthogonal to that of the previous implementation.

This in turn has several important implications. First, the DG to SFG projection in this implementation is orthogonal to the direction in which the bits of the modulus,  $N$ , are propagated. This means that the bits of  $N$  are shifted through the cells 32 of the SFG rather than held constant for a given cell. Second, the carry propagates are in the direction of the projection. This means that the carry terms are not propagated from cell to cell. Instead, the carry terms are accumulated within

the cell. The corresponding schedule for this implementation is shown in FIGURE 16. In FIGURE 16, the cell mapping is outlined in dark shading. The time lines follow the direction that the result propagates. The circuit that results from this projection is portrayed in FIGURE 17. From this circuit, it can be seen that one distinct difference in the circuit from the other implementations is that all cell-to-cell terms propagate only in one direction. There are no carry terms out of the cell 34. Additionally, there are also no terms which are globally distributed or are buffered through a cell 34 to any other cell 34. There are no combinatorial paths through the cell. Therefore, since there are no global or reverse connections, the connection between any two cells is equivalent and hence the array can be made to grow almost unbounded. The cell implementation is of low complexity and therefore can operate at high frequencies.

Finally, the cell connectivity has implications regarding device physical layout. There is little or no need to maintain the physical proximity of the first and last cells of the chain. The chain of cells could be arranged in a variety of geometries from a single linear array to a serpentine arrangement.

In the embodiments presented for the interleaved as well as for the concurrent multiplication case, the circuit designs were accomplished assuming all digit operations were accomplished using binary digits. It is possible to consider higher order radix operations and the significance thereof as applied to the concurrent multiplication methodologies.

The motivation for the consideration of higher order radix operations is the desire to increase overall throughput by doing more work on each pass through the digit loop of the algorithm. The larger the digit size, the fewer total digit operations that are required. With fewer digit operations, fewer clock cycles are required and thus more work is accomplished in parallel. The cost for accomplishing this increase in throughput is that the complexity of the cell required to do the bit operation is correspondingly increased. However, the total number of cells is also decreased. Doubling the digit size should cut the number of required cells in half. While it seems that the area should therefore remain constant, that is not exactly the case. The total area, to some extent should be expected actually to decrease, at least in general. This is because there are still as many operations to perform and so the occupancy of a specific arithmetic operator remains the same, whereas the amount of storage (flip/flops) between stages is reduced. Unfortunately, there are other things to consider that can have a large impact on the area and performance.

The first factor that impacts the area required to implement higher radix versions of the multiplier circuit relates to the multiplication by  $N$  that fell out of the calculation in the binary radix case. Unfortunately, it does not fall out in the cases where there is a higher order radix. Therefore, implementation using a higher order radix means that there some additional computational tasks to perform.

Another factor to consider is that, by increasing the work that each cell performs and thus the complexity

of the cell is accordingly increased. The effect that this has on the area can produce unanticipated results. This results because the area required to implement the cell is highly dependent on the constraints imposed by the period of the required clock cycle. The advantage of the binary radix implementations is that cell size for the array can be made very simple, thus permitting high clock frequencies. This is important to enable driving the circuit at high clock frequencies, but if system constraints are such that slower clocks frequencies are desired, then this can actually be a disadvantage.

The block diagram originally portrayed in FIGURE 1 shows the most general case for implementation of the reduction circuit using a higher order radix. As was done in the binary case, the comparison and subtraction step can be neglected. For the case of a radix 4 implementation, the multiplication by  $N_c$  results in the addition of another addition operator at the front of the cell. Depending on the value of  $N$ ,  $N_c$  can take on either the value 1 or the value 3. An example cell implementation of the radix 4 reduction cell is illustrated in FIGURE 18. FIGURE 18 illustrates a minimal cost cell architecture. It is possible, however, to reduce the cell maximum path delay. This can be accomplished by insertion of additional adder cells and doing the summation operations more in parallel.

Traditionally RNS (Residue Number System) multipliers have been implemented in hardware using various ad hoc techniques such as table lookups to perform the modular multiplication of the residues. As long as the residue digits remain small and the selection



of the prime basis for the RNS system remains a fixed constant, these techniques remain relatively efficient. Application of Montgomery's technique to residue number systems, however, opens up other possibilities. Circuits  
5 derived from these techniques to perform the modular multiplication can be implemented in such a manner that the circuit can be configured for a change in the modular base, or alternatively, can be a resource shared in a variety of manners.

10 The basis set for a residue number system draws members from the set of the first  $n$  prime numbers. It is not necessary to use consecutive primes to form a valid basis set. Let  $N < n$ . The basis set is defined by forming an  $N$ -tuple of distinct prime integers. Let the basis set  
15 be denoted by:

$$P = \{P_1, P_2, \dots, P_N\},$$

where each of the  $P_i$  denotes a unique prime number. For convenience, assume the convention of ordering the set from smallest to largest. To represent an integer,  $A$ , as  
20 a residue number, then there is formed the  $N$ -tuple:

$$A = \{a \bmod P_1, a \bmod P_2, \dots, a \bmod P_N\}.$$

Each member of the  $N$ -tuple is commonly referred to as a digit of the residue number. The residue number can uniquely represent values in the range:

25 
$$a \in \left\{0, 1, 2, \dots, \prod_i^N P_i - 1\right\}.$$

Multiplication of residue numbers is accomplished by the multiplication of like digits. A unique characteristic of this operation is that the result is formed with no digit to digit carry operations required.

Thus, a large multiplication can be broken down to smaller multiplies which can be performed very quickly in the absence of carry propagate conditions.

Consider application of Montgomery's Algorithm in a manner similar to that in previous descriptions. For each prime  $P_i$  of the basis set, it is of interest to find a corresponding convenient number  $R_i$ , where  $R_i > P_i$ , and where  $R_i$  serves as the modulus of a more convenient field for purposes of multiplication. Specifically, it is useful to consider  $R_i$  of the form:

$$R_i = 2^n.$$

Each of these serve as an input to some instance of the modular multiplication block. The multiplication of each digit then proceeds as a binary number and the result converted back by an additional application of the reduction algorithm.

For many applications of residue arithmetic, it is very likely that the prime basis set may be chosen as a fixed set of prime numbers. Indeed, it is likely for the majority of applications that the number will be fixed and specifically built into the hardware. In either case, however, it is possible to achieve reductions in the complexity of the circuit and increased efficiency by choosing the parameters of the problem such that the conversion multiplications have reduced complexity from the most general case.

It is possible to realize additional efficiencies in the circuit. To see how this is possible, it is useful to consider the following expansion of an  $N$ -Residue number:

$$|x|_N = \left| \sum_{i=0}^{n-1} 2^i |N x_j|_N \right|,$$

where  $N$  is the modulus,  $n = \log_2 N$  is the number of bits required to represent the number, and the  $x_j$  are the binary coefficients of the expansion. In this equation, the notation  $|x|_a$  denotes  $x \bmod a$ . The sequence of powers of 2, taken mod  $N$ , are periodic.

$$|2^i|_N = |2|2^{i-1}|_N|_N = \dots = |2^p|2^{i-p}|_N|_N.$$

However, it is clear that there must be some value for  $p$ ,  $p \neq i$ , such that

$$|2^i|_N = |2^p|_N.$$

Consequently,

$$|2^i|_N = |2^{i-p}|_N,$$

which is therefore periodic with period  $p$ . Furthermore,

$$|2^p|_N = 1.$$

In particular, the period,  $P(R)$  can be defined to be the distance between two 1's in the sequence. If  $N$  and  $R$  are well chosen, then the term,  $R^k \bmod N$ , can be selected to be equal to 1. Thus, in doing so, the term,  $R^k \bmod N$ , is also equal to 1. Consequently, the above circuit can be simplified for those cases.

The generalized result is useful because, for those prime numbers where a suitable choice for  $R = 2^r$  has a period that itself is an integer multiple of 2, then the period of  $R^2 \bmod N$  is half that of  $R \bmod N$ . This is significant because, by using higher order powers of  $R^k$ , not only is it possible to realize unitary multipliers,

but also simplifies the complexity of the  $\text{Reduct}(x)$  circuit. Consider a finite field  $F$  and an non-zero element  $\alpha$  in that field. If the sequence of powers of  $\alpha$  is constructed,

5 
$$A = \{\alpha^0, \alpha^1, \alpha^2, \alpha^3, \dots\}.$$

Each power from this sequence must also be in the field  $F$ , and further the sequence must repeat. If the period of the repeat is denoted by the number  $p$ , then the sequence can be uniquely represented by

10 
$$A = \{\alpha^0, \alpha^1, \alpha^2, \alpha^3, \dots, \alpha^{p-1}\}.$$

The integer  $p$  is referred to as the order of  $a$ , and is denoted by  $\text{ord}(a)$ . It should also be clear that

$$\alpha^p = 1.$$

For a given instance, it is generally difficult,  
15 given particular values for  $q$  and  $a$  to predict a value for  $\text{ord}(\alpha)$ . However, once the value of  $\text{ord}(\alpha)$  is known, then it is easy to find  $\text{ord}(\alpha^i)$ . A sequence of interest in particular is the sequence

$$R = \{2^0, 2^1, 2^2, 2^3, \dots, 2^k \dots 2^{p-1}\},$$

20 as defined over the finite field represented by  $F = \alpha \bmod q$  and where  $q$  is selected from among the set of all prime numbers greater than 2. Select values for  $R_k = 2^k$ , and smallest powers of  $R_k$ , such that

$$R_k^i = 1.$$

25 Thus for  $\text{ord}(R_k) = p$ , then  $\text{ord}(R_k^i) = p / \text{gcd}(i, p)$ . First generate the terms  $\text{ord}(R_k)$  for various prime numbers and then determine the value of  $\text{ord}(R_k^i)$ . This gives the smallest size binary representation for  $R_k$  that has a unitary conversion coefficient.

As a simple illustration of how this technique is employed, consider the case of a Mod 113 multiplier. To implement the multiplier requires a 7 bit by 7 bit multiplication, resulting in a 14 bit output. This requires four stages of reduction to reduce the result. As discussed previously, each of the reduction stages requires an adder and a multiplexer. The circuit also requires a state controller (FSM) to time the bits through each stage. Bit zero of the result at each stage is used to gate the multiplexer in the next stage. Thus, this bit needs to be retained in a storage element (flip/flop) for the duration of the reduction. The state controller controls when this value is saved for each stage and when data is allowed to propagate through each stage. The unique feature of this embodiment is that the result does not require post multiplication since the value of  $R^{-k}$  is unitary for this particular choice of parameters. By similar means then it is also possible to pick combinations of parameters resulting in simplified or minimal multiplicative terms.

This embodiment lends itself to designing efficient RNS multipliers such as may be applicable in some DSP applications. FIGURE 19 illustrates a simple example of application to an RNS multiplier 36. The RNS numbers to be multiplied each are represented by a vector of values.

The RNS example is an example of an application where the multiplier may be best implemented using a higher order radix and fewer stages. This specific implementation generally would involve multiplication over several smaller prime fields. In most cases the

basis set could be fixed. This is because the size of the multiplier likely would not be subject to change.

Table 1 illustrates the parameters required for several small prime numbers, including 113, that would be  
5 required to achieve unitary post or pre-multiplication.

Table 1 Multiplier Parameters for Several Selected Prime Numbers

| N   | N** <sup>-1</sup> | N <sub>comp</sub> | r(bits) | R   | R** <sup>-1</sup> | k  | Rred**k |
|-----|-------------------|-------------------|---------|-----|-------------------|----|---------|
| 257 | 1                 | 1                 | 1       | 2   | 129               | 16 | 1       |
| 97  | 1                 | 7                 | 3       | 8   | 85                | 16 | 1       |
| 673 | 1                 | 7                 | 3       | 8   | 589               | 16 | 1       |
| 113 | 17                | 111               | 7       | 128 | 98                | 4  | 1       |
| 109 | 357               | 155               | 9       | 512 | 33                | 4  | 1       |
| 577 | 449               | 63                | 9       | 512 | 71                | 16 | 1       |

From the results illustrated in this table, it can  
10 be seen that for these, as well as other prime numbers, it is possible to choose the rise of the radix, R as well as the number of rounds, k, such that post multiplication in these cases is not required. The last row of the table represents the number that must be post multiplied  
15 to convert from an R-Residue number to integer format.

As another embodiment it is possible to construct a multiplier as a combination of a serial multiplication circuit and a reduction chain to do recursive multiplication such as might be used to perform  
20 exponentiation. The architecture of this multiplier is illustrated in FIGURE 20. This circuit can be adapted to calculate powers or multiply numbers sequentially.

A primary application for modular multiplication is in the calculation of exponents in a large modular field. This has a key role in important public key cryptographic applications like RSA. As the economic importance of cryptography to society increases for the protection of the electronic infrastructure, the ability to efficiently provide the necessary performance required becomes crucial. It is the ability to implement the exponentiation of integers in large finite fields that is central to the economic viability of these technologies. It is the efficiency of implementation that will largely determine to what degree they can be used to help solve the data security issues that are being created.

Exponentiation is an inherently sequential problem. Algorithms to calculate exponents involve the sequential determination of increasing powers of the base number. The standard algorithms involve squaring and multiplication. Powers of the base are typically derived by first finding the square of the base. This is then used, by squaring, to find the base to the fourth power. This process is repeated to find the higher powers of the base. As each power is derived, a current value for the exponent is obtained by multiplication by the value of the power of the base if the corresponding coefficient is a one (binary radix).

Consequently as each round of squaring and multiplication is performed, the size of the product term grows. If the size of the multiplicands is  $r$  (bits), then the resulting product is of size  $2r$  bits. In the field of natural numbers, the size of the final product for an exponent of size  $r$  (bits) is therefore  $r^2$  bits. If

the desired exponentiation is required to be performed over a field of size  $r$ , it is desirable to perform a modular reduction of the product after each squaring and each multiplication operation from  $2r$  to  $r$  bits. This requires additional operations to be performed at each round of the algorithm, but is intended to reduce the total work required, as well as the storage and physical resources required, by managing the growth in the problem size.

One well-known algorithm for the performance of exponentiation is described by:

```
function BasicExponentiate (A, E, N, r)
  Value := 1;
  Power := A;
  for i in 0 to r-1 loop
    if  $E_i = 1$  then
      Value := Value * Power;
      Value := Reduction (Value, N);
    end if;
    Power := Power * Power;
    Power := Recution(Power, N);
  end loop;
  return Value;
end function Exponentiate;
```

This algorithm calculates the quantity  $A^E \bmod N$  where  $A$ ,  $E$ ,  $N$  are all  $r$ -bit quantities. In this algorithm description, it can be clearly seen that it accommodates the direct inclusion of either the concurrent or the interleaved modular multiplication implementations previously discussed. The reduction function applied above can be implemented by the suggested Montgomery Reduct Function described previously. In this case, it is therefore optimal that a pre or post multiplication occur to transform from the integer to  $R$ -Residue space.



Assuming that there is post multiplication to reduce the result, the function BasicExponentiation, re-written, can be replaced by the function ModularExponentiation:

```
function ModularExponentiate (A, E, N, r,  
5 const_R_r)  
  Value := 1;  
  Power := A;  
  R := 2**r;  
  Nc := ModComplement(N, r);  
10 for i in 0 to r-1 loop  
  if Ei = 1 then  
    Value := Value * Power;  
    Value := Reduct(Value, R, N, Nc);  
  end if;  
  Power := Power * Power;  
15 Power := Reduct(Power, R, N, Nc);  
end loop;  
Value := Value * const_R_r;  
Value := Reduct(Value, R, N, Nc);  
20 return Value;  
end Exponentiate.
```

The constant const\_R\_r is added to the standard argument list as an additional parameter. This constant can be pre-calculated based on a specific choice of  
25 modulus N and the field R in which the calculations take place. Algorithm Reduct resulted in an effective multiplication by  $R^k$ , so therefore each multiplication requires an equivalent post multiplication by  $R^k$ . Each  
step of the exponentiation represents two  
30 multiplications, one to derive the power and another to multiply the power by the current value. Hence, there are  $2r$  multiplications required, each requiring a post multiplication by  $R^k$ . Therefore it is necessary to post-multiply by  $\text{const\_R\_r} = R^{2rk} \bmod N$ .

35 Performance and resource consumption questions regarding the efficiency in which this algorithm may be performed relate to the degree of parallelism which can

be imposed on mapping this algorithm to a specific hardware realization. Taken as a strictly sequential process with no attempt to take parallel operations into account and assuming that all operations are performed as  
5 bit serial operations, we get an approximate estimate of the cycles required to implement this algorithm.

This estimate represents an upper bound on the cycle time required to achieve a single exponentiation. There is no reflection in this estimate of various  
10 opportunities to perform operations in a parallel or pipelined manner. As will be hereinafter discussed, there are multiple opportunities to take advantage of parallelism to decrease the cycle time requirement and there are opportunities to take advantage of pipelining  
15 techniques to increase circuit efficiency or overall throughput.

An examination of the algorithm suggests that, if parallel hardware can be allocated, that the operations of squaring the powers and multiplication of the running  
20 value can be performed concurrently. It should be evident that the next power required can be obtained while the current value is obtained. Thus, if tightly coupled parallel multiplication stages are provided, then the product of the squaring operation can be fed into the  
25 input of the accumulation multiplication. It can also be fed back into the input of the squaring operation for the next round of squaring. A circuit diagram illustrating an implementation of this principle is illustrated FIGURE  
21.

30 One advantage of the present invention is that the output of a common binary multiplier is utilized and

implemented as modular reduction in a very simple cell format as a serial chain of cells. Each of these simple cells consists simply of a single bit adder, a multiplexer, and associated register. Thus, the

5 reduction cells can be made to operate at a very high clock rate. A simple example is the multiplication technique for a small modulus, but the technique is applicable to building very large multipliers. When used recursively, the size of multiplication is only limited

10 by storage and time bounds.

It is also possible to implement a large binary multiplier as a combination of a smaller parallel multiplier and product term accumulator. This architecture permits multiplication with less clock

15 latency and perhaps more area efficiency, at a reduced clock rate. Pipelining the parallel multiplier to boost the clock rate reduces the area efficiency and thus makes serial implementation more attractive. To implement a "large" modular multiplier, for example of the order of a

20 thousand bits, requires recursive use of the multiplier cell to calculate partial product terms which would be accumulated and fed sequentially into the reduction stage as results are available, starting with the least significant term. As is shown in FIGURE 22, it is

25 possible to use the multiplier on reduction blocks recursively to calculate the multiplication of very large integers. The multiplier block can be used to perform term-wise multiplication and terms of like powers can be summed and accumulated. This in turn can be passed to the

30 reduction chain, which is used recursively to perform the necessary number of stages of reduction. This reduction

is accomplished while the next term is being accumulated. This allows for a very efficient and straightforward circuit trade-off between hardware real estate and the time required to perform the operation.

5       The present invention is useful in such areas as cryptography, where multiplication and exponentiation in modular fields is of great interest. Alternative implementations provide the opportunity to consider design tradeoffs provided in the various technologies  
10       available.

Key Escrow and Key Recovery Systems are members of a larger class of cryptographic systems. Both are examples of systems targeted for deliberate exploitation in some specific manner, or whose cryptographic strength is  
15       deliberately limited.

A system is generally considered to be secure if the complexity is termed to be intractable for the anticipated length of time that the data is of value. There is no exact cutoff point, hence key sizes are  
20       chosen to be many orders of magnitude stronger than what might be minimally necessary. This is done in order to guard against better attacks or improvements in technology. Even at that, systems which were once believed to be secure for quite some time to come are  
25       frequently being broken.

A concern with techniques such as limited key size restrictions is that these requirements make it virtually impossible to guarantee, with any degree of certainty, that a given weak system cannot be broken for some  
30       specific cost and performance benchmark. One feature of the system of the present invention is that it provides a

methodology for providing a deliberately weakened system accomplished in a manner that allows for more objective measurements of the strength of the system.

5 The present invention utilizes cryptographic techniques to provide finite, measurable barriers to information access. This is accomplished using the notion of a computational work cost function. This can be viewed, by way of analog, to the concept of economic cost functions.

10 The key problem to address with regards to successful realization of a finite cost system is the difficulty of proving performance bounds on algorithms and the optimality of those algorithms. Indeed this is a theoretical question that appears to be largely ignored  
15 in recent proposals and publications related to the subject of "weak cryptography."

20 A traditional notion in cryptography is that information can be protected by throwing up computational barriers to defeat attempts at understanding the data by an unauthorized party. This concept is referred to as computational security. The validity of the idea is based on mathematical concepts related to the general topic of computational complexity. Computational complexity relates to the study of algorithms and the  
25 difficulty or number of discrete steps in solving a problem by way of various algorithms. The complexity of computing answers to problems by the application of algorithms is generally described in terms of computational complexity classes.

30 One-way functions are fundamentally important to modern cryptography. Most practical cryptosystems are

based on the concept of computational security. Cryptographic systems based on computational security depend on the problem of breaking the system being computationally intractable. The algorithm for breaking  
5 the system must be so difficult that the system cannot be broken using an attainable amount of computational power within a useful amount of time. A one-way function is therefore a function  $y=f(x)$ , such that calculating the result of the function,  $y$ , given a specific value for  $x$  is considered "easy", whereas to find  $x$  given  $y$  is  
10 considered to be an intractable problem.

The normal definition of intractability is that the problem of finding the inverse of the function is a  $NP$  problem (and that  $NP$  is strictly harder than polynomial,  
15  $P$ , problems). There are two problems associated with this idea. In the first place, the notions of attainable computational power and useful time are vague. The assumption of what is tractable changes with time so that which is considered secure today proves to be insecure at  
20 some point in the future. Secondly, it has not been proven that  $P \subset NP$ , and therefore it is not really known if true one-way functions even really exist.

Using this understanding of the nature of one-way functions, there is developed a notional concept of a  
25 limited one-way function. A limited one-way function can be defined as one where the condition that the function to be of  $NP$  complexity is relaxed. Limited one-way functions therefore are members of  $P$  and hence are tractable. The only requirement to meet the definition  
30 is that the function be highly asymmetric in terms of work functions to calculate and invert the function. In

this context, asymmetry may be defined in terms of the ratio of work required to invert the function to the amount of work required to calculate the value of the function. Consequently, this ratio is of polynomial  
5 order and the degree of the ratio determines the degree of asymmetry and hence suitability for application.

Key escrowing systems can be characterized as being strongly asymmetric in their basic input/ output bandwidth requirements. Typically, many keys are  
10 created, but few need ever be retrieved. Typically the input bandwidth of the key escrow system far exceeds the aggregate output bandwidth, perhaps by many orders of magnitude. A balanced design for such a system suggests that the algorithm for storage and retrieval match the  
15 actual bandwidth requirements. It is also advantageous to implement an algorithm that requires far less work to make a deposit than it does to make a withdrawal. Referred to herein, applicable functions that display asymmetric work requirements are defined as *limited one-*  
20 *way functions*. A feature of the invention is to use limited one-way functions to effectively limit the rate of withdrawals from a Key Escrow database. There is a distinction from normal one-way functions and hence use of the term *limited* because candidate functions are not  
25 necessarily strongly one-way.

Candidates for useful limited one-way functions should be provably asymmetric. Ideally, there should be provable bounds on the ratio of the amount of work required to go forward versus the work required to go  
30 backwards. This is important because the effectiveness of the function to impose costs on the user is

characterized by upper and lower bounds on the ratio of work in the two directions. Another aspect of this methodology deviates significantly from a classical cryptographic application. The key escrow database server has access to the plaintext key information by possessing the master key, but is simply being penalized by a work function for key withdrawal. Therefore, the algorithm may legitimately only require that each transaction be accomplished taking a prescribed length of time, on average. This constitutes a significant shift of paradigm. The result is to limit or regulate the general flow of data out of the key escrow database. Hence, to satisfy the demands of this requirement, it may only be necessary to determine the average or statistical complexities of the limited one-way function and it's inverse.

One possible candidate would simply be to use a suitable cryptographic technique with a limited key size. This is the most straight-forward approach. It is very similar to partial key escrow techniques such as proposed by Shamir. The difference in this case being that the entire key may be escrowed but the work may be imposed prior to accomplishing key withdrawal rather than after withdrawal from the escrow. The decryption (withdrawal) is accomplished either by brute force techniques or by directly breaking the key. Since suitable cryptographic techniques to accomplish this are based on solving NP-complete problems, there are not provable tight lower bounds on the work required to accomplish this. Additionally, there may be a large differential in work required between the normal withdrawal technique (if



implemented by brute force) and the backdoor path (breaking the key). Therefore, there are not necessarily very tight controls on the work required to accomplish this.

5       An algorithm will be discussed that implements, as an example of a limited one-way function, one that has some desirable properties. This algorithm implements a limited one-way function by building in a front door path into a cryptosystem which is easier than breaking the  
10       underlying strong cryptosystems. This front door path, however, has performance bounds, having statistical control. The work required to go in through this front door path is considerably harder than the back door path available if one has possession of the secret  
15       information. It is, however, considerably easier than breaking the strong cryptosystems. This work difference between the three paths is illustrated in FIGURE 23.

20       In accordance with the present invention, there is described an algorithm as an example for implementing a limited one-way function. This example algorithm is suitable for consideration for use as a work cost function for application to the problem of limiting withdrawals from a key escrow database. As was  
25       previously explained, the imposition of a cost function is one of the methods employed to limit access to a key escrow or key recovery database by otherwise authorized individuals.

30       A description of the algorithm will be described in terms of a message dialogue that occurs between an originator, Alice, and a message recipient, Bob. An eavesdropper, Eve, listens in on their conversation and

records what passes between them, assuming perfect access to their messages. The names Alice, Bob, and Eve are traditionally used to describe participants in cryptographic transactions within the technical literature of the cryptographic community. As originator, Alice is the key requester and as the message recipient, Bob serves as the key generator. In this context, Eve will serve as the recording mechanism for the transaction that occurs between Bob and Alice. Eve does not have access to their private information or intermediate results. Eve only sees the messages that pass between them. It is further assumed that Eve has perfect knowledge of this transaction. As the recorder of this conversation, Eve is the key escrow agent in this model.

Also outlined is the achievable computational advantage that Alice and Bob can expect to achieve over Eve, the eavesdropper. This computational advantage is expressed in terms of the work required by each party to the conversation to perform the algorithm. This work differential then becomes the cost function required to discover their agreement. This then constitutes a restraint placed on the key recovery process.

Next, there is described an algorithm to the delay problem for limiting withdrawals from a key database. The application of this in the context of a national key recovery system is described, and appropriate parameters given.

The following algorithm is an example of how a suitable Limited One-Way function might be implemented. The originator, Alice constructs a set of  $N$  puzzles,

which are sent to Bob. Bob selects one of the puzzles, solves it and passes information derived from the puzzle back to Alice. An eavesdropper would have to solve  $O(N)$  puzzles to discover their agreement.

5 In the algorithm here described, however, there shall be applied the notion of symmetric public key trap door problems to the procedure that Alice uses to construct the problems. These are trap door problems for encryption and decryption where the keys may be used  
10 interchangeably. Therefore either of the two keys may be used for encryption, and the other may be used for decryption. Alice will create a set of private public key pairs (or more generally encryption decryption function pairs). These will serve as the basis of the  
15 puzzle set.

Consider a case where the puzzle transmitted by Alice to Bob is as follows: Alice generates, using the private encryption keys, matched cryptogram/decryption key pairs  $(C_0, K_{p0})$ ,  $(C_i, K_{pi})$ ,  $i = 1, 2, \dots, N$   
20 corresponding to a set of messages  $\{M_i\}$  where  $i = 1, 2, \dots, N$  and where  $i$  is simply an index used to identify which member of the set of pairs is referenced. The message  $M_i$  contains a corresponding token  $T_i$ . In this example, the familiar RSA system is used to illustrate  
25 the concept. Use of the RSA system is not, however, a general requirement. RSA is chosen because it has the property of key interchangeability. Consequently, Alice generates the N-element puzzle set,  $P$ :

30 
$$P = \{(C_0, K_{p0}), (C_1, K_{p1}), \dots, (C_i, K_{pi}), \dots, (C_N, K_{pN})\}$$

where  $C_i$  is the  $i$ th cryptogram corresponding to the  $i$ th message  $M_i$ , and where  $Kp_i$  is the  $i$ th public key generated by Alice.  $Ks_i$  is used to encrypt  $M_i$  and is the secret key retained by Alice. Alice bundles each cryptogram with the decryption key, which is the public key. It is assumed that both Alice and Bob commonly agree upon the specific encryption function (which is assumed to be RSA). Once forming the puzzle set,  $P$ , Alice communicates it to Bob. Therefore we have the operation:

10 Alice  $\rightarrow$  Bob :  $\{P\}$ .

Note that this notation indicates that the set  $\{P\}$  is transmitted from Alice to Bob.

Bob chooses one puzzle from the set at random. Therefore Bob selects the puzzle index,  $j$ , at random,  
15 where  $j \in 1, \dots, N$ , then chooses the  $j$ th ordered puzzle pair,  $(C_j, Kp_j)$ , from the set  $P$ . Bob derives the token information  $T_j$  from the cryptogram  $C_j$  by performing the decryption:

$$D(Kp_j, C_j) = M_j; T_j \subset M_j,$$

20 where  $D$  is the agreed upon decryption function. Accordingly, Bob has "solved" the puzzle merely by applying the decryption key to its corresponding cryptogram to extract the original message. Thus, to perform this operation, Bob performs a small finite  
25 operation. This operation is also very simple and its complexity reasonably measurable. It would be very difficult for Bob, or anyone else to improve significantly on the performance required to derive this answer.

Bob then forms the message,  $\mu_j = (T_j \text{ \& \& } R)$ , which is the concatenation of the selected token and a randomly chosen vector  $R$ . Bob then proceeds to form the response message  $S$ , such that:

5            $S = E(Kp_j, \mu_j),$

where  $E$  is the agreed upon encryption function and  $Kp_j$  is the public key corresponding to the puzzle that he originally chose and hence to  $\mu_j$ . Bob then sends  $S$  to Alice. Hence

10           Bob  $\rightarrow$  Alice :  $S$ .

Alice may then recover  $T_j$  by application of the secret key  $Ks_j$ . However, Alice does not know the choice Bob originally made and hence which of the  $N$  keys to use. She therefore must try keys randomly from the set of  $N$  until a match is made. Alice therefore must perform more work than Bob corresponding to the size of  $N$ . To recognize the correct result, structural information is embedded in the token  $T_j$ , so that a legitimate decode can be distinguished from a non-legitimate decode. Next, the description proceed to illustrate the computational advantage that Bob has over Alice, as well as the advantage that either has over an eavesdropper, Eve.

15           

20           

It is assumed that the channel between Alice and Bob cannot be tampered with, but is not secure. An eavesdropping observer, Eve, may see both the initial message  $P$  and the response  $S$  from Bob but may not modify either. Eve therefore has all of the  $N$  public keys but does not have the corresponding secret keys. To "discover" the message Eve is faced with the problem of first deriving the  $N$  tokens, then forming  $N \cdot R$  messages of

25           

30

the form ( $T_j$  &  $R$ ). Finally, Eve must then encrypt these and compare the result to  $S$  in order to discover Bob's choice for  $j$ .

5 The amount of work imposed by this algorithm upon the various parties involved must also be considered. The work that Eve is forced to perform is now greater however than that performed by either Bob or Alice. Eve does not have the benefit of having the decryption keys that are available only to Alice. Eve must try all

10  $Avg(N \cdot R)$  possibilities to discover the decision that was derived where we use the notation  $Avg( )$  to refer to the average behavior of the solution. The concept of average behavior is the approach used for analyzing the solution to the "front-door" approach.

15 Eve is at a disadvantage to Alice by a factor of  $Avg(R)$ , the amount of randomization information embedded in the problem. This is because Eve does not possess the decryption keys, which are the sole property of Alice and are not revealed in the process. Eve is forced to try

20 all  $Avg(N \cdot R)$  combinations until a match is found. Eve does, however, have an alternative possible attack. Eve may attempt to break  $Avg(N)$  decryption/encryption key problems, directly attempting to discover the secret keys. This approach to solving the problem is referred

25 to as being the traditional "back-door" approach to solving the problem. The work associated with this approach thus represents an upper limit on the amount of work that Eve must perform. Accordingly, system parameters can be selected such that Eve is forced to go

30 in through the built in front door, because that is the only computationally viable path. Let the amount of work

performed to directly break the key problem by brute force methods (the back-door approach) be represented by  $Avg(W_B)$  and the amount of work that Alice performs using trapdoor information to accomplish a decryption to be represented by  $Avg(W_T)$ . Presume that for reasonable choices of system parameters that  $Avg(W_T) \ll Avg(W_B)$ . Then it is also reasonable to presume that  $Avg(W_T) \approx W_E$  if the encryption and decryption processes are symmetric. This assumption is reasonable, for instance, of some public key cryptosystems such as RSA. The work that is now required by each party involved is given by:

$$W_{Bob} = W_D = W_E.$$

$$W_{Alice} = N * W_E = Avg(N * W_T),$$

$$W_{Sve} = Avg(N) * W_D = MIN(Avg(N * R * E), Avg(N * W_B)).$$

The work required by Bob to efficiently perform this calculation (assuming RSA) can be estimated to be  $Kn^2 \log n \log \log n$ , where  $K$  is a system dependent constant. It was recently reported that the fastest single chip implementation for performing modular exponentiation is capable of evaluating 560 bit operations per 5.5 msec. Consider an example system using this chip, and using 560 bit numbers and  $N$  to be  $10^3$  and  $R$  to be  $10^4$ .

$$W_{Bob} = W_D = 5.5 \text{ msec},$$

$$W_{Alice} (avg) = N * W_E / 2 = 2.75 \text{ sec},$$

$$W_{Sve} = N * R * W_E / 2 = 2.75 \times 10^4 \text{ sec} \approx 7.6 \text{ hours}.$$

These numbers illustrate appropriate choices for a system using the device described herein. If the specific implementation was directly incorporated in the hardware

that controlled the storage media, then it would be cost ineffective to try to defeat the system.

By using the described methodology, it is possible to control the amount of work that Eve must perform to solve the puzzle. In the example above, withdrawals could only occur in this system at the maximum rate of about 1146 per year. If this were to be applied to a national system for escrowing telecommunications keys, these numbers might be appropriate as well. To accomplish this, Eve is forced to perform a very large number of simple operations (on average) to resolve the answer. Because of this large number of required similar operations, it is possible, by adding enough randomization, to take advantage of average computational complexity in determining the required work. This has a distinct advantage over implementing a single weak cryptofunction such as with a limited key size. The desired performance of the proposed algorithm can be controlled by adjusting the statistical parameters. This offers a greater degree of control over the results than that offered by the simpler approach.

To apply this algorithm to the problem of key escrow, consider a record made of the exchange between Alice and Bob (such as would be seen by Eve) as the material to be deposited in the escrow. Bob and Alice negotiate for a key exchange with Alice as the key requester and Bob as the key generator. Eve represents the recording/withdrawal mechanism. Prior to storage, the transaction is encrypted using a strong cryptographic technique and master keys used to protect the overall database. It is also practical to incorporate secret



splitting mechanisms as well. Depending on the application Alice may either keep her secret puzzling keys, or the keys may simply be discarded as part of the process. This escrowing process is illustrated FIGURE 24.

Withdrawal of the keying material would involve retrieval of the transactions that had occurred between Bob and Alice first using the database master key for decryption to recreate the transaction. This transaction would then have to be "broken" in the manner that Eve would need to accomplish in order to discover Bob and Alice's agreement. Thus, this second stage of decryption represents the controllable work function used to limit the rate of key withdrawal. This key withdrawal process is illustrated in FIGURE 25.

The basic algorithm, previously described involved an originator, Alice, creating a set of N trapdoor functions each paired with a corresponding token. These were then to be transmitted to Bob, who in turn, would select one of these pairs at random, add randomization information to the corresponding token, encrypt using the randomly selected trapdoor function, and then return the result to Alice. Alice then uses the retained trapdoor information to discover which choice Bob made. Hence, we have Alice forming a set of encryption key/token pairs such as:

$$P = \{ (T_1, E_1), (T_2, E_2), (T_3, E_3), (T_4, E_4), \dots, (T_N, E_N) \},$$

from which Bob chooses at random the kth pair  $(T_k, E_k)$ . Bob takes the token,  $T_k$  and concatenates randomization information R. He then uses the encryption key,  $E_k$  to

encrypt the combination. Therefore, Bob forms a cryptogram  $C$  such that:

$$C = E_k(T_k \& \& R),$$

where the operator  $\&\&$  denotes the concatenation operation.  $T_k$  is assumed to be an  $n$ -bit quantity, where  $n = \log_2(N)$ .  $R$  is assumed to take on  $R$  discrete values and is represented by an  $r$ -bit number

The computational advantage thus achieved over an eavesdropper in this basic algorithm is dependent on the amount of randomization embedded in the problem. To discover Bob's choice the eavesdropper, Eve has the choice of breaking the  $N$  trapdoor problems that Alice originally created, or forming  $N \cdot R$  cryptograms of the form that Bob returned. As long as the work required to break the underlying cryptosystems greatly exceeds that of creating these  $N \cdot R$  cryptograms, the eavesdropper is forced to solve the problem by random search. This assumes that there is no structure in the results space which can be exploited. The required work is determined by solving a large number of small problems. Whereas the computational complexities of difficult problems typically do not have well defined bounds, especially lower bounds, it is possible to get tighter results on very simple operations. By forcing the calculation of a large number of simple problems, all of which whose results appear to be randomly related, the Law of Large Numbers is utilized to statistically control the work required to perform the average withdrawal.

The system of the invention is to force the eavesdropper through a work-controlled front door. This serves as the basis for providing a withdrawal capacity

on a key escrow system while requiring a measurable amount of work to do so. Because the algorithm can be incorporated directly into the storage mechanism, the rate of withdrawals is therein limited by its capacity to  
5 perform the withdrawal algorithm. This approach solves the rate of withdrawal problem in an algorithmic manner.

It is possible to increase the apparent uncertainty in the problem without growing the natural size of the computational engine by use of a technique analogous to  
10 cipher chaining. As previously described in the basic algorithm, the initiator Alice forms a set consisting of  $N$  pairs of tokens and encryption keys. Also, as had been done previously, the recipient, Bob, selects one of these pairs at random and then calculates a cryptogram of the  
15 form:

$$C_1 = Ep_1 (Tp_1 \ \&\& \ R_1 \ \&\& \ S),$$

where  $Tp_1$  is the selected token;  $Ep_1$  is the corresponding encryption key;  $P_1 \in \{1, 2, \dots, N\}$  is the index of the choice Bob made from the set  $P$ ,  $R_1$  is randomization  
20 information; and  $S$  is information added for signature purposes to permit valid decodings to be distinguished from invalid decodings.

To achieve his computational advantage over the eavesdropper, Bob relies on the uncertainty of his choice  
25 of puzzles, as well as randomization information that is added to the problem. Bob can increase this advantage by recursively making additional choices from the originally transmitted puzzle set. It is possible to achieve significant improvement by taking the message from this  
30 second choice and concatenating the results from the encryption of the first choice, encrypting this

combination with the key from the second choice. Thus Bob chooses, again at random, a new pair  $(Tp_2, Ep_2)$  from the set  $P$ . Again, Bob concatenates signature and additional randomization information. This result is subsequently encrypted using the second encryption key. Consequently, we have:

$$C_2 = Ep_2 (Tp_2 \&\& R_2 \&\& S).$$

He then proceeds to take the result from his first selection, the cryptogram  $C_1$ , applies the newly selected encryption function, and concatenates this with the second cryptogram. This result is then encrypted using the second encryption key. Thus, we have for the output,  $O_2$ , of this stage:

$$\begin{aligned} O_2 &= C_2 \&\& Ep_2(C_2) = Ep_2 (Tp_2 \&\& R_2 \&\& S) \&\& Ep_2 (Ep_1 \\ &\quad (Tp_2 \&\& R_2 \&\& S)) \\ &= C_2 \&\& C_{2a}, \end{aligned}$$

where  $C_{2a}$  is used to denote the term  $Ep_2 (Ep_2 (Tp_2 \&\& R_2 \&\& S))$ .

It therefore requires two encryption operations to encrypt the information at stage two due to the increase in the block size of the input vector. The resulting number of bits of output information grows by size of the cryptogram  $C_{2a}$ . For two stages only, Bob's response to Alice is to transmit  $O_2$ . Thus, the work required to discover both of Bob's choices by random search seems to grow from being  $Avg(N \cdot R)$  to  $Avg(N^2 \cdot R^2)$ , where  $Avg$  denotes the average computational complexity. This system is illustrated in the block diagram shown in FIGURE 4.

At the receive end, Alice recovers Bob's selection by undoing the work that Bob has performed. Alice does possess unique information. Alice has the trapdoor key

information allowing Alice to quickly reverse the encryption that Bob performed. Thus, Alice has the set, **D**, of decryption keys corresponding to the transmitted (hence public) keys.

5 
$$D = \{D_1, D_2, D_3, D_4, \dots, D_N\}.$$

Alice tries keys one at a time, until a match is made on the second message. This enables Alice to recover the cryptogram from the first choice.

$$D_{p2}(C_2) = D_{p2}(E_{p2}(T_{p2} \&\& R_2 \&\& S)) = T_{p2} \&\& R_2 \&\& S.$$

10 Alice recognizes the successful decode because of the signature information S. Consequently, there is some finite, measurable probability of a spurious decode. That occurs when a incorrect choice of the decode key accidentally maps to a pattern that matches the  
15 signature.

Alice uses the discovered choice of  $D_{p2}$  to unroll the second term,  $C_{2a}$ . Thus, Alice gets the intermediate result:

$$D_{p2}(C_{2a}) = D_{p2}(E_{p2}(C_1)) = C_1$$

20 Alice again selects keys one at a time until the first choice is recovered,

$$D_{p1}(C_1) + D_{p1}(E_{p1}(T_{p1} \&\& R_1 \&\& S)) = T_{p1} \&\& R_1 \&\& S.$$

Finally, the result is determined by the successful recognition of the signature S.

25 The work required by Alice to do this decode operation is therefore still  $\text{Avg}(N)$ . This process can be extended further. If Bob makes  $k$  choices then the work required by Alice grows to  $\text{Avg}(k^2 * N)$  while the work required of the eavesdropper grows to  $\text{Avg}(k(N * R))^k$ .

We can express the general case of a  $k$ -stage version of the algorithm with the recursive relationship:

$$O_k = C_k \ \&\& \ E_{P_k}(O_{k-1}),$$

where it should be recognized that the encryption  
5 function must be applied  $k-1$  times in order to encrypt all of the information associated with the term  $O_{k-1}$ . The block diagram of FIGURE 26 illustrates this algorithm. As can be seen from this FIGURE, the output space of the final stage of the algorithm grows as  $2^{k_l}$ , where  $l$  is the  
10 number of bits in  $C_l$ . It is only the final result,  $O_k$ , that is passed back to Alice. Therefore, neither Alice nor the eavesdropper, Eve, sees any of the intermittent results.

Once Bob transmits  $O_k$  back to Alice, it becomes  
15 Alice's task to reverse Bob's selection process. As before, Alice tries keys randomly to unravel the encryption to get  $T_k$ . She performs the operation:

$$D_{P_k}(C_k) = D_{P_k}(E_{P_k}(T_{P_k} \ \&\& R_k \ \&\& S)) = T_{P_k} \ \&\& R_k \ \&\& S.$$

$$D_{P_k}(O_{k-1}) = D_{P_k}(E_{P_k}(O_{k-1})) = D_{P_k}(E_{P_k}((C_{k-1} \ \&\& E_{P_{k-1}}(O_{k-2}))).$$

20 Alice continues this process recursively until all of Bob's choices are discovered.

To further enhance the security of the key escrow system, there is implemented a system to spread (diffuse) the information prior to input at each encryption stage.  
25 This is accomplished by mixing the token information for the current stage, the cryptogram information from the previous stage, randomization information, and the signature information together to break down structure before encryption. To do this effectively, it is  
30 necessary to use a reversible mixing function so that the

structure built into the problem is spread out, yet such that the function can be easily inverted by Alice. The objective of this mixing function is to remove recoverable structure. This precludes the eavesdropper  
5 from attacking the problem piecemeal. Eve must now search the entire results space for possible matches to the  $k$ th stage message, otherwise break the underlying encryption problems.

The process Bob goes through is now modified to be:

10 
$$C_k = E_{P_k}(M(T_{P_k} \& S \& R_k \& C_{k-1})),$$

and Alice's decryption process becomes:

$$\begin{aligned} M^{-1}(D_{P_k}(C_{P_k})) &= M^{-1}(D_{P_k}(E_{P_k}(M(T_{P_k} \& S \& R_k \& C_{k-1})))) \\ &= T_{P_k} \& S \& R_k \& C_{k-1}. \end{aligned}$$

The added mixing function does not impose  
15 significant cost on Alice. Since Alice retains the decryption keys, Alice may do the decryption operation, invert the mixing function, and perform a match on the signature field information. Thus, the additional step of reversing the mixing function is imposed essentially  
20 with minimal cost. Consequently, the work that Alice performs at each stage of the decryption process in discovering Bob's set of choices is still  $\text{Avg}(kN)$  and the overall cost is  $\text{Avg}(k^2N)$ . A block diagram illustrating this process, which includes the mixing function, is  
25 illustrated in FIGURE 27.

One measure of the computational complexity of the work required by the various participants is the number of fixed size encryption or decryption operations required. Bob obviously performs  $k$  encryption operations

at each stage. Alice must perform  $\text{Avg}(kN)$  decryption operations for each stage, starting with stage  $k$  and working backwards, Eve, lacking the secret keys is forced to work in the forward direction, or else solve the  $N$  trap door problems. Thus, Eve must try, on average, all combinations of Bob's possible choices at each stage. The mixing function prevents Eve from segmenting the problem and attacking it by observing partial results. The number of decryption operations necessary to perform the work required of Alice is  $\text{Avg}(k^2N)$ , whereas the number of encryption operations that are required by Eve to discover the choices that Bob made at each stage of the algorithm is given by

$$\sum_{i=1}^k (NR)^i = \frac{(NR)[k(NR)^{k+1} - (k+1)(NR)^k + 1]}{(NR-1)^2}.$$

A summary of the number of operations required at each stage by Alice, Bob, and Eve is detailed in Table 2.

Table 2 Work Required at Each Stage

| STAGE | ALICE              | BOB               | EVE                      |
|-------|--------------------|-------------------|--------------------------|
| 1     | $N$                | 1                 | $RN$                     |
| 2     | $2N$               | 2                 | $2 * (RN)^2$             |
| 3     | $3N$               | 3                 | $3 * (RN)^3$             |
| $k$   | $kN$               | $k$               | $k * (RN)^k$             |
| Total | $\text{Avg}(k^2N)$ | $\text{Avg}(k^2)$ | $\text{Avg}(k * (RN)^k)$ |

Consider now a limited one-way function, implemented using the Discrete Log Problem implementing the delay function in a key escrow system. Initially, take the key



information to be escrowed,  $K_e$ , and compute the following exponent:

$$V_e = \alpha^{K_e} \bmod N$$

This would be the value to be escrowed. Unless  $N$  were deliberately poorly chosen, which is one option, then this problem is intractable. Therefore, in order to reduce the problem to a tractable problem, which would be solvable in a reasonable time, it is necessary to break  $K_e$  into smaller partitions and encrypt each block of data separately using a smaller key corresponding to the weakened algorithm. Thus consider the binary expansion of  $K_e$ ,

$$K_e = \sum_{i=0}^{n-1} K_{e_i} * 2^i,$$

where the  $K_{e_i}$  are the binary coefficients. Utilizing a block of data of size  $l < n$ , the number of partitions is equal to the ratio of  $n$  to  $l$ , rounded to the next higher integer. Denote the number of blocks of data by  $L$ . Then the  $j$ th block is denoted by

$$B_j = \sum_{i=j}^{(j+1)N-1} K_{e_i} * 2^i,$$

where  $j \in \{0, 1, \dots, L-1\}$ . Using a reduced size discrete log modulus, chosen to be of size  $l$ , and calculating the exponent of each block separately:

$$C_j = \alpha^{B_j} \bmod N, j \in \{0, 1, \dots, L-1\}$$

the  $C_j$  then constitute the information that is actually escrowed.

The multistage algorithm previously described requires a special mixing function. The purpose of this

function is to remove structure from the information prior to each stage of encryption. This is used to limit the effectiveness of an attack based on the potential for an otherwise limited size outcome space. There are a  
5 number of possibilities for functions suitable to be used as mixing functions to meet the needs of the multistage algorithm.

Candidate functions to consider for use as suitable mixing functions include simply rearranging the bits in a  
10 predetermined manner as in a fixed "mixing box", linear transformation over the Galios Fields  $GF(2^n)$ , or applying a symmetric cryptosystem such as DES. One measure of the effectiveness of the selected mixing function can be ascertained by taking into account the number of bits of  
15 the output of the mixing function which change, on average, any time a particular input bit changes value. To understand the procedure for obtaining this result, first consider the output pattern resulting from each possible input pattern where a given bit is value logic  
20 zero. Then consider the output pattern that results from that same input pattern, except where the bit that was previously held to logic zero is now set to logic one. The total number of bits that change over the range of possible input patterns from this set are counted and a  
25 percentage derived. This procedure is repeated for each bit of the input vector. From the results, a relationship can be obtained for each bit relating the probability of a given input bit value given the outcome for any given output bit. For an effective mixing to  
30 occur, the probability of each input bit equal to a

specific value should be selected to be as close to 0.50 as is practical.

Consider the simple example of using a linear transform as a mixing function. Selecting functions of the form  $aX + b \pmod n$ , then the effectiveness of this type of function can be visualized by plotting the results for vectors of very limited size. Consider an example applying fixed size multiplier and where the parameter  $b$  is set to zero. The mixing effects are good for the lower bits but ineffective for the upper bits. Another anticipated conclusion is that there exist both good and bad choices for parameters as well.

Although a simple linear transformation does not provide a reasonable amount of mixing, ideally it would be advantageous to keep the mixing operation simple for most applications. In the previous example, a reasonable amount of mixing occurred of the least significant bits for many choices of parameters. However, little mixing occurred for the most significant bits. This suggests that the operation might be modified to achieve similar results for both ends of the vector. One possible modification would be to perform the linear transform, invert the bit order, and then to perform a second linear transform. This would roughly even out the amount of mixing that occurs from bit to bit. Consequently, there are excellent choices for parameters to achieve the desired mixing for this example. A value would be selected that results in an expected value of half of the output bits changing for any randomly selected input. Linear transformation is thus one potential choice to use as the basis for a mixing function for the multistage

encryption application. It is easily invertable, and its contribution to the overall computational complexity is easily measured.

It is possible to the use of classical symmetrical cryptosystems for use as a mixing function. A symmetric cryptosystem has the useful property of being able to use the same key for both encryption as well as decryption. The use of a symmetrical cryptosystem to mix information is additionally very desirable since the function, by its very nature is designed to minimize any possible structure that remains in the information. Thus, it may safely be assume that data within an encrypted block is nearly "perfectly" spread. Since the purpose of the function is simply to spread the information in randomizing manner, while retaining the property of reversibility, it is not necessary to keep the key secret. Indeed, it is essential that both Bob and Alice know the key so that the function can be inverted. Additionally, if the key is not made public, then it may become impossible for Eve to discover the contents of the transaction between Bob and Alice, assuming that the key is large enough to be considered secure. This defeats the possibility of successful key recovery if the algorithm is applied to a key recovery system.

Public key cryptosystems may also be utilized for the mixing function. Again, as was the case with symmetric cryptographic algorithms, it is necessary to make both keys public so that the function can be reversed. Public key cryptosystems do share the property of spreading the information in a manner that makes it look statistically random, thus removing the structure of

the information. These mixing functions have an advantage in that generally both the encryption and decryption operations are relatively simple. Since the function is used for mixing and not encryption, then the  
5 issue of complexity of breaking the cryptosystem does not exist. The keys are all public. Most public key cryptosystems as commonly used are based of a standard fixed block data size. However, a standard symmetric cryptosystem, such as DES, it is normally possible to  
10 tailor the block data size to meet the needs of the implementation.

Care in the selection of a candidate cryptosystem to perform the algorithm must be exercised. The mixing function and the encryption function should not have  
15 interactions that would provide a source for attack. If the two steps, that of mixing and of encryption, are commutable, then the entire purpose of mixing is completely undone. This additional requirement can be expressed as:

20 
$$E(M(X)) \neq M(E(X))$$

where  $E$  is the encryption operation and  $M$  is the mixing operation. This should hold true for all but a small finite number of points in  $X$ .

An example of this principle can be seen by  
25 considering the mathematical operation of exponentiation. If the encryption operation is of the form:

$$E(X) = X^{K_e} \bmod N,$$

and if mixing were of the similar form:

$$M(X) = X^{K_m} \bmod N,$$

30 Then applying mixing followed by encryption results in:

$$E(M(X)) = E\left(X^{K_M} \bmod N\right) = \left(X^{K_M} \bmod N\right)^{K_e} \bmod N = X^{K_e K_M}.$$

Similarly,

$$M(E(X)) = M\left(X^{K_e} \bmod N\right) = \left(X^{K_e} \bmod N\right)^{K_M} \bmod N = X^{K_e K_M}.$$

This illustrates an example where the two operations can  
5 be commuted. Clearly the two operations should be chosen  
using dissimilar operations that are incompatible with  
regards to preserving functional structure.

It is the ability to evaluate the performance of a  
cryptographic system that determines, in part, the degree  
10 to which confidence can be placed in its use. This  
performance evaluation normally is analyzed, based on  
what computational work is required to "break" the  
system. The proposed algorithm for a key escrow system  
has the characteristic of being constructed in such a  
15 manner as to be deliberately breakable. A unique feature  
is that it provides a specifically built in solution path  
that is also the optimal path to the solution.  
Therefore, a would-be attacker is compelled to use this  
built-in path in order to efficiently break the problem.  
20 This "front-door" path that is built into the system  
requires the solution of a large number of simple  
problems of measurable complexity. This is in an attempt  
to provide an algorithmically introduced work cost  
function that can be controlled within tightly specified  
25 statistical bounds. Assuming that the simple problems to  
be solved have some distribution of required work times  
based on the set of input vectors and that each such  
solution is to be treated as independent, identically  
distributed (i.i.d.) random variables.

The randomization is introduced into the system by Bob adding random information at each iteration stage as well as making randomly related puzzle choices. When randomization is added to the system, the upper and lower  
5 bounds on the variance of the work function decreases. This means that it becomes increasingly difficult to do very much better (or worse) than the average time required to solve a simple problem. This is an important aspect of the application. Because of the stochastic  
10 nature of the system involved, it is possible to examine the average computational complexity of the simple problems rather than a difficult to derive tight upper or lower bounds on the complexity of those problems. Also it is possible to compare the average complexity of a  
15 large number of these simple problems to the comparatively poorly bounded complexity of one complex encryption problem. The performance of the key escrow system is thus directly related to how closely it is possible to bound the average overall complexity.  
20 Consequently, it is important to be able to predict how much randomization is required to achieve a given level of confidence.

While the invention has been described in connection with a preferred embodiment, it is not intended to limit  
25 the scope of the invention to the particular form set forth, but, on the contrary, it is intended to cover alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined in the appended Claims.

WHAT IS CLAIMED IS:

1. Apparatus for multiplication of modular numbers, comprising:
  - 5 a two-dimensional dependency array of cells, where each cell comprises:
    - a first full adder receiving a first input signal, a second input signal, and a clock signal,
    - a second full adder receiving an output of the
    - 10 first full adder, a third input signal, and a clock signal;
    - a half adder receiving an output of the second full adder and a fourth input signal;
    - a first storage circuit coupled to the second full
    - 15 adder;
    - a second storage circuit coupled to the half adder;
    - and
    - a third storage circuit coupled to the half adder.
2. Apparatus for multiplication of modular numbers  
20 as in Claim 1 wherein the two-dimensional dependency array comprises a row by column configuration of cells.
3. Apparatus for multiplication of modular numbers  
as in Claim 1 wherein the two-dimensional dependency  
array comprises groups of two dependency graph cells  
25 coupled together to add within one pair of cells product terms of equal weight.
4. Apparatus for multiplication of modular numbers  
as in Claim 1 further comprising a binary number  
reduction circuit sequentially coupled to the output of  
30 the two-dimensional dependency array of cells.



5. Apparatus for multiplication of modular numbers, comprising:

a two-dimensional dependency array of cells, wherein each cell comprises:

5 a first full adder receiving a first input signal, a second input signal, and a clock signal;

a second full adder receiving a third input signal, a fourth input signal, and a clock signal;

10 a third full adder receiving an output of the second full adder, a fifth input signal, and an output of the first full adder, and providing an output signal;

a fourth full adder receiving an input from the first full adder, an input from the second full adder and providing an output to the first full adder;

15 a first storage circuit coupled between the second full adder and the third full adder;

a second storage circuit coupled between the fourth full adder and the first full adder; and

20 a third storage circuit in a feedback loop coupled to the fourth full adder.

6. Apparatus for multiplication of modular numbers as in Claim 5 further comprising a reduction circuit coupled to the two-dimensional dependency array and sequentially receiving signals therefrom.

25 7. Apparatus for multiplication of modular numbers as in Claim 6 wherein said reduction circuit comprises a row by column array of cells.

8. Apparatus for multiplication of modular numbers  
as in Claim 6 wherein the two-dimensional dependency  
array of cells comprises a binary multiplier, and the  
reduction circuit comprises concurrent reduction  
5 sequentially receiving signals from the binary  
multiplier.

0  
1  
2  
3  
4  
5  
6  
7  
8  
9

9. Apparatus for multiplication of modular numbers, comprising:

a serial array of interconnected cells each comprising:

5 a first full adder receiving a first input signal, a second input signal, and a clock signal;

a first storage circuit coupled in a feedback loop between an output of the first full adder and an input thereto;

10 a second storage circuit receiving the first input signal and providing an output signal;

a third storage circuit coupled to the first full adder and the second storage circuit and providing an output to the adjacent cell.

15 10. Apparatus for multiplication of modular numbers as in Claim 9 wherein adjacent cells are interconnected in a serial adder configuration.

11. Apparatus for multiplication of modular numbers as in Claim 8 further comprising a concurrent reduction cell, and wherein the concurrent reduction cell comprises:

a first full adder receiving a first input signal, a second input signal, and a clock signal;

25 a second full adder receiving an output of the first full adder, a third input signal, and a clock signal;

a first storage circuit coupled to an output of the first full adder and an input thereto;

a second storage circuit coupled to an output of the second full adder and an input thereto;

30 a third storage circuit coupled to an output of the first full adder and providing an output; and

a fourth storage circuit coupled to the second storage circuit and the second full adder.

12. Apparatus for multiplication of modular numbers as in Claim 10 further comprising:

5       a first serial shift register having as an output the first signal coupled to the full adder;

      a second serial shift register providing the second input to the first full adder of the first cell in the serial configuration; and

10       a third serial shift register serially receiving an output from the third storage circuit of the last serial adder in the serial configuration and providing a parallel output signal.

MULTIPLICATION OF MODULAR NUMBERS

ABSTRACT OF THE DISCLOSURE

A circuit for the implementation of modular multiplication of numbers comprises an alternative formulation of the algorithm first proposed by R.C. Montgomery..The modified Montgomery algorithm is implemented in one of a plurality of circuits comprising full adders, half adders, registers and gates.

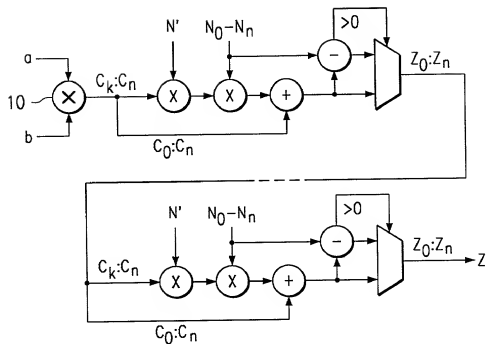


FIG. 1

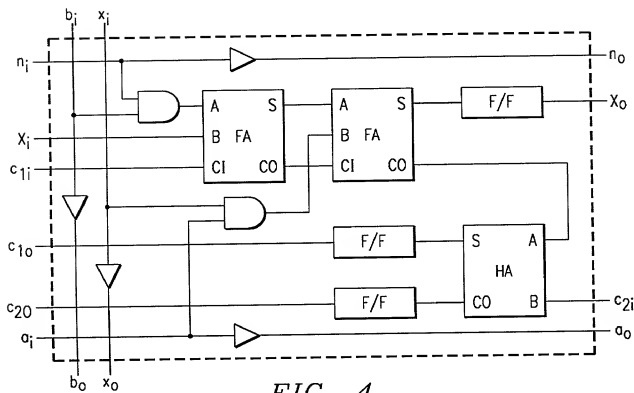


FIG. 4

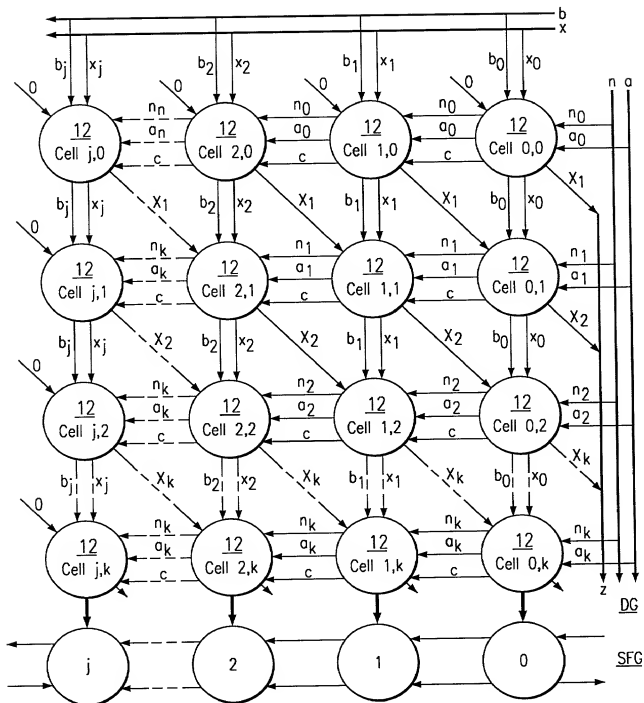


FIG. 2

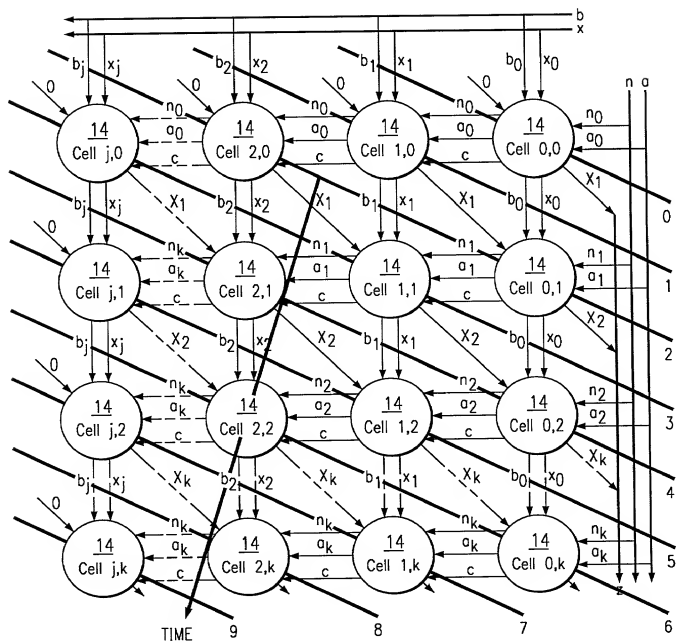


FIG. 3



001260' 22089960

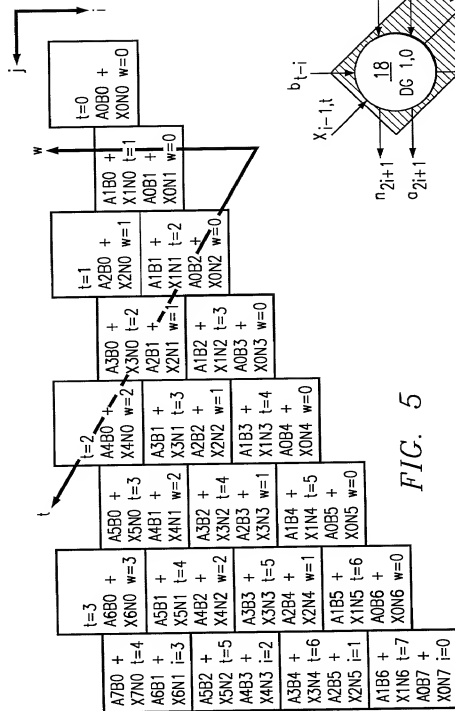


FIG. 5

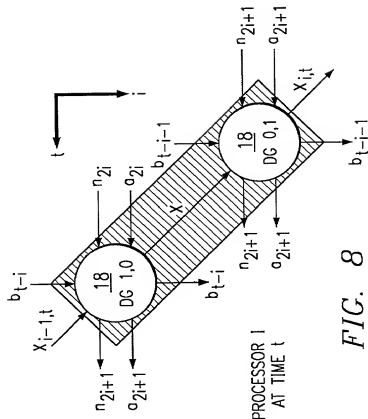


FIG. 8

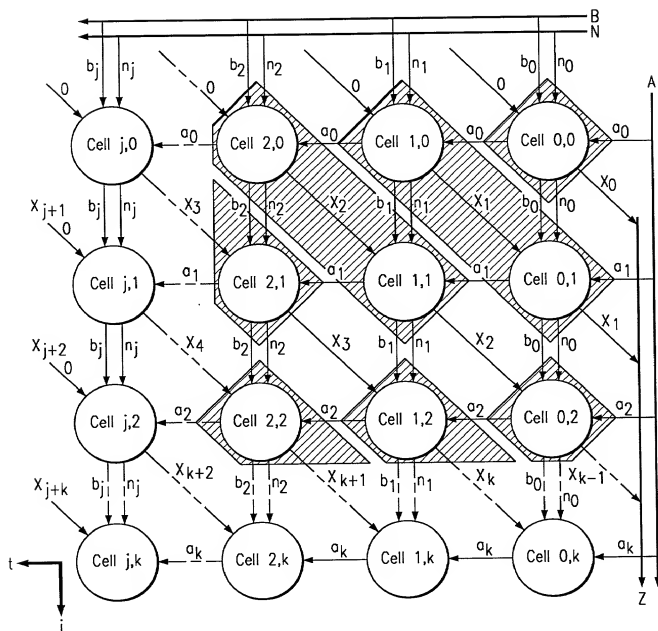


FIG. 6

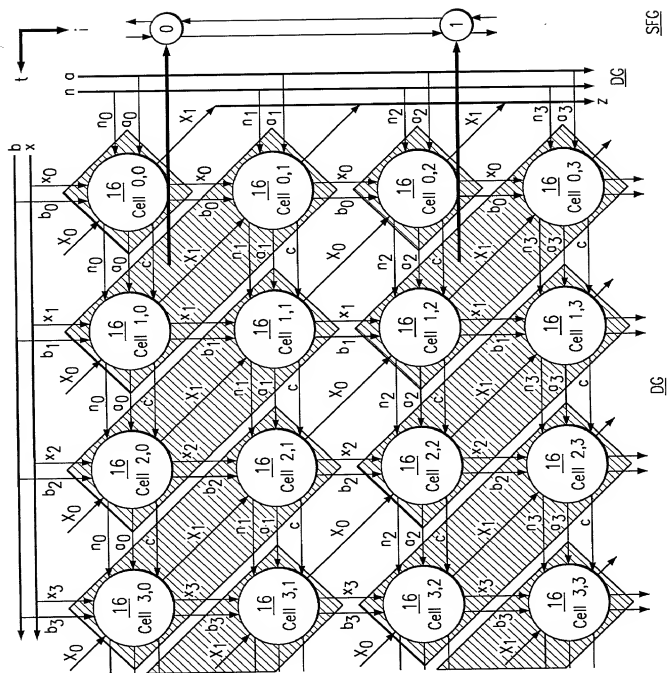


FIG. 7

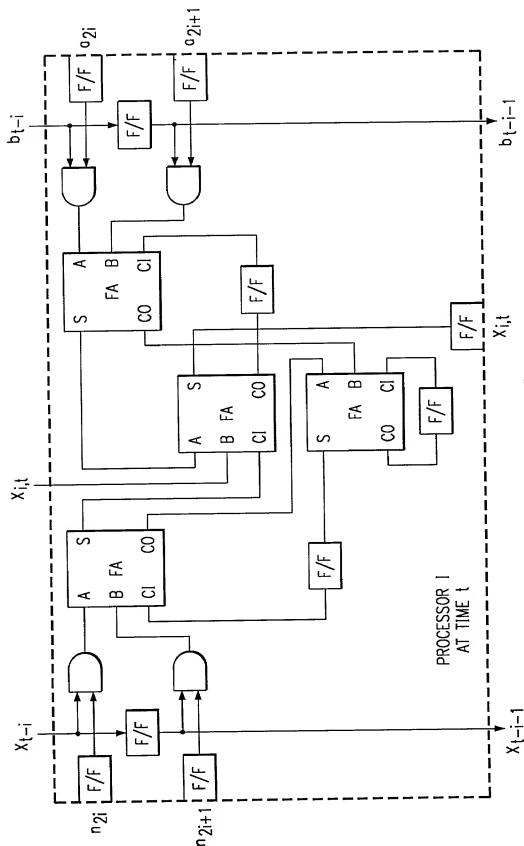


FIG. 9

BITS OF Z FEED  
SEQUENTIALLY  
ACROSS

 $z_{ii}$ 

FIG. 10

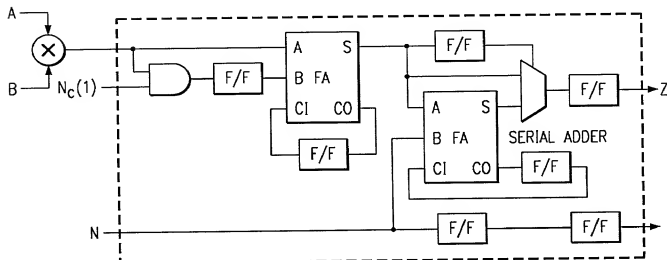
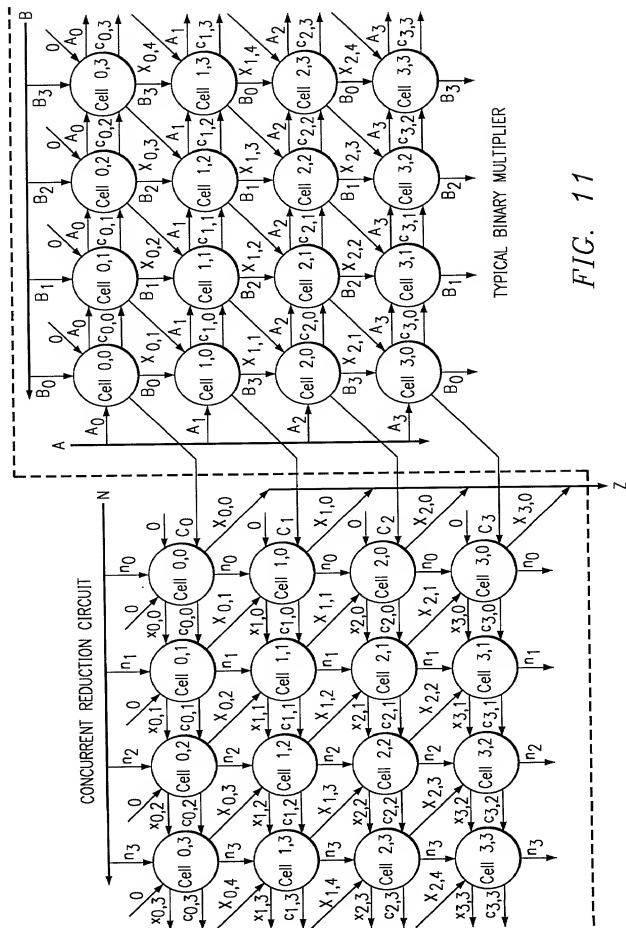


FIG. 18



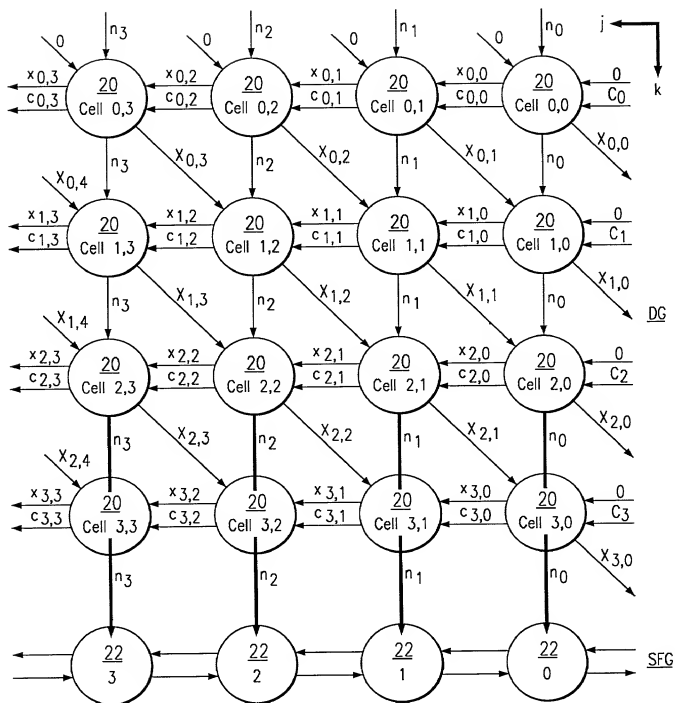


FIG. 12






FIG. 14

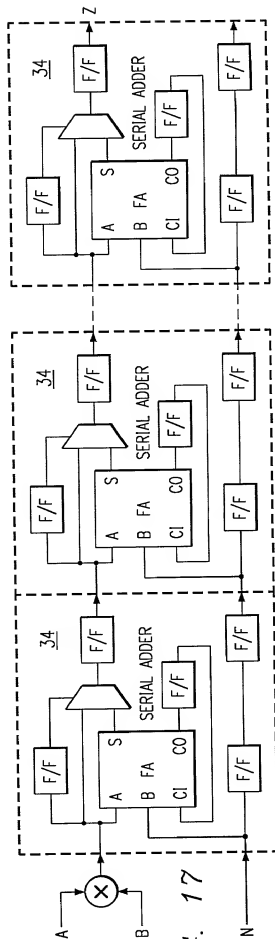
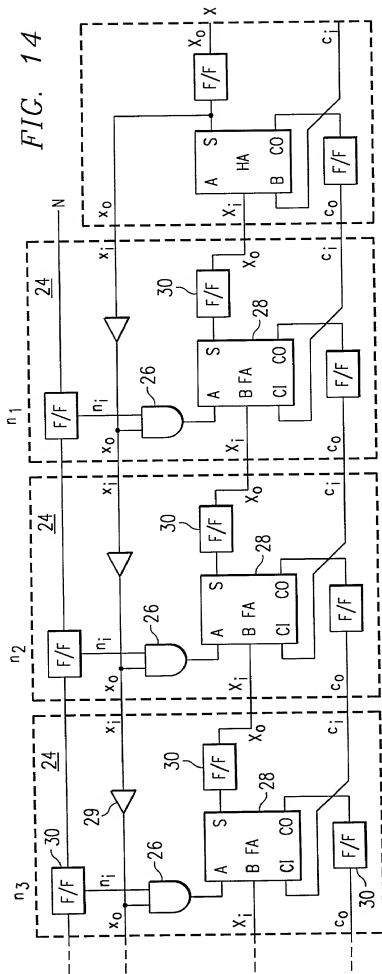


FIG. 17



FIG. 15

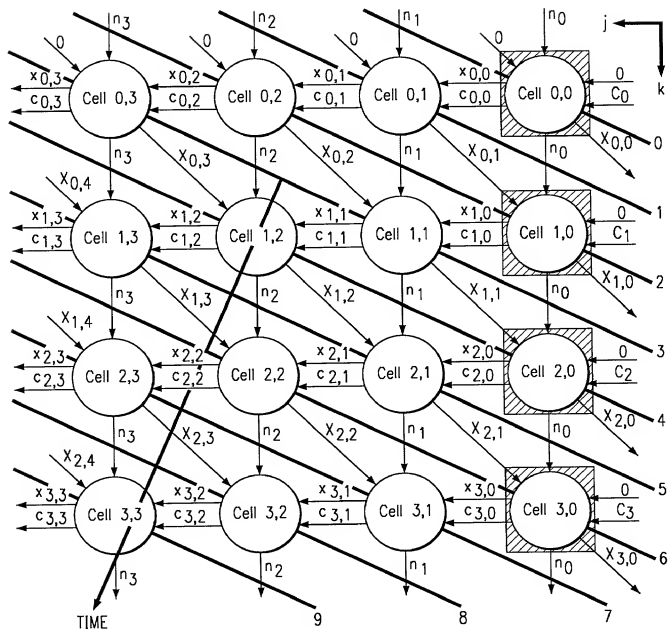
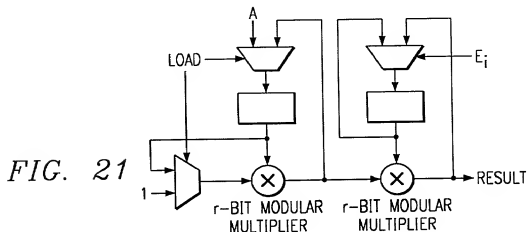
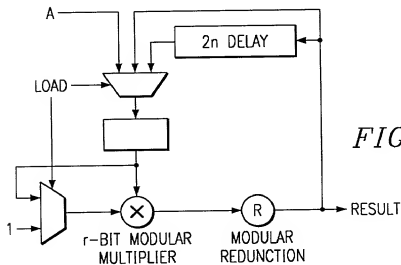
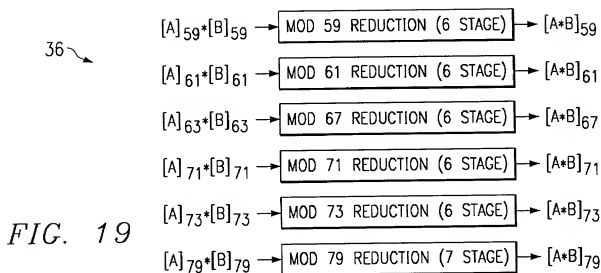


FIG. 16



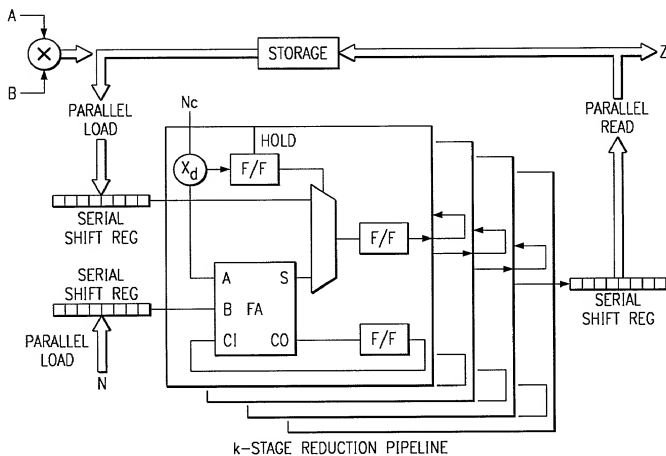


FIG. 22

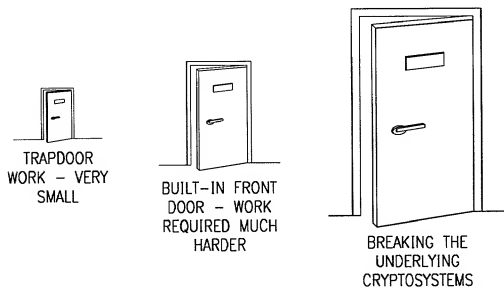


FIG. 23

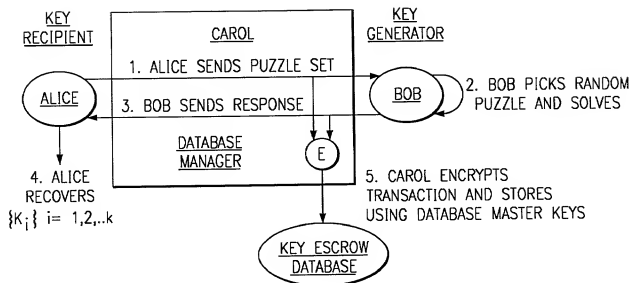


FIG. 24

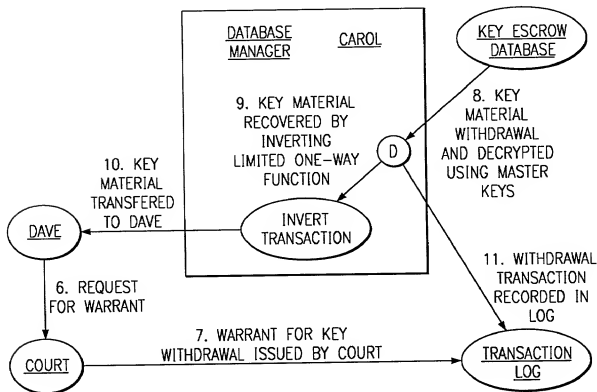


FIG. 25

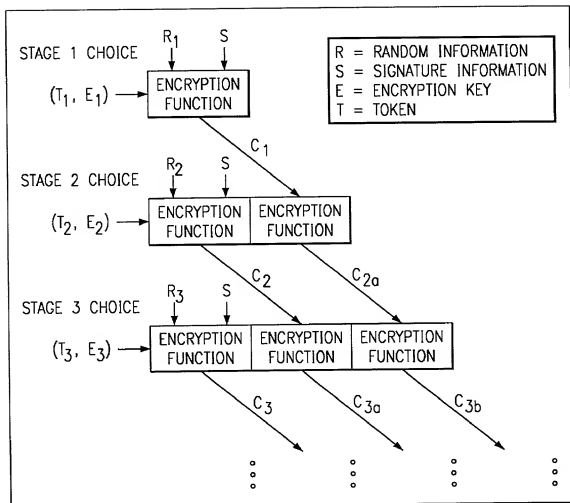


FIG. 26

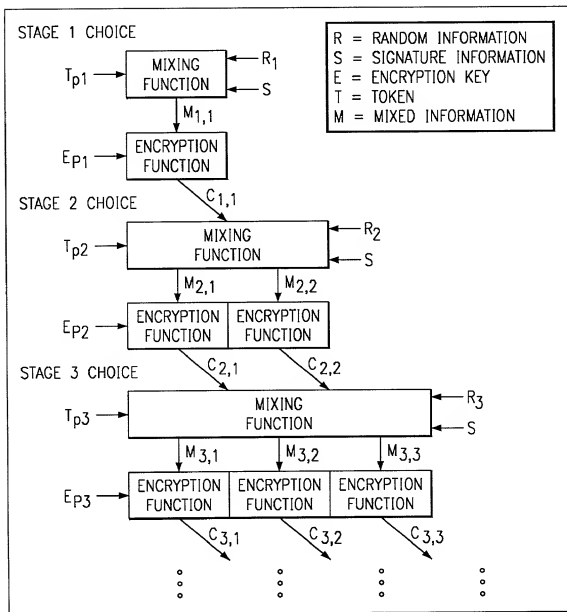


FIG. 27



DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ***Multiplication of Modular Numbers***, the specification of which (check one):

  x   is attached hereto; or

       was filed on        as Application Serial No.        and  
was amended on        (if applicable);

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

| <u>Number</u> | <u>Country</u> | <u>Date<br/>Filed</u> | <u>Priority<br/>Claimed</u><br>(Yes) (No) |
|---------------|----------------|-----------------------|---|
|---------------|----------------|-----------------------|---|

NONE

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Application  
Serial Number

Date Filed

60/155,505

9/22/99

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all

information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

| <u>Application</u><br><u>Serial Number</u> | <u>Date Filed</u> | <u>Status</u> (Patented, Pending, Abandoned) |
|--|-------------------|--|
| NONE                                       |                   |  |

I hereby appoint the following as my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities:

|                      |                 |
|----------------------|-----------------|
| René E. Grossman     | Reg. No. 22,656 |
| Glenn H. Lenzen, Jr. | Reg. No. 29,320 |
| Philip P. Berestecki | Reg. No. 26,502 |
| William C. Schubert  | Reg. No. 30,102 |
| Leonard A. Alkov     | Reg. No. 30,021 |
| Colin M. Raufer      | Reg. No. 40,781 |
| Robin R. Loporchio   | Reg. No. 40,071 |
| David L. Kinsinger   | Reg. No. 33,927 |
| John J. Snyder       | Reg. No. 39,380 |
| Steven T. Wernicki   | Reg. No. 39,416 |

all of Raytheon Company; and

|                           |                 |
|---------------------------|-----------------|
| Jerry W. Mills            | Reg. No. 23,005 |
| Robert M. Chiaviello, Jr. | Reg. No. 32,461 |
| Ann C. Livingston         | Reg. No. 32,479 |
| Thomas R. Felger          | Reg. No. 28,842 |
| Charles S. Fish           | Reg. No. 35,870 |
| Kevin J. Meek             | Reg. No. 33,738 |
| T. Murray Smith           | Reg. No. 30,222 |
| Barton E. Showalter       | Reg. No. 38,302 |
| David G. Wille            | Reg. No. 38,363 |
| Bradley P. Williams       | Reg. No. 40,227 |
| Terry J. Stalford         | Reg. No. 39,522 |
| Christopher W. Kennerly   | Reg. No. 40,675 |
| Harold E. Meier           | Reg. No. 22,428 |
| Douglas M. Kubehl         | Reg. No. 41,915 |
| Samir A. Bhavsar          | Reg. No. 41,617 |
| Thomas R. Nesbitt, Jr.    | Reg. No. 22,075 |
| James J. Maune            | Reg. No. 26,946 |
| Scott F. Partridge        | Reg. No. 28,142 |

James B. Arpin  
Jay B. Johnson  
Robert W. Holland  
James L. Baudino  
Tara D. Knapp  
David M. Doyle  
William R. Borchers  
Brian W. Oaks  
Luke K. Pedersen  
Matthew B. Talpis  
Keiko Ichiye  
Jeffery D. Baxter  
Thomas A. Beaton  
Kurt M. Pankratz  
Brian E. Szymczak  
Thomas J. Frame

Reg. No. 33,470  
Reg. No. 38,193  
Reg. No. 40,020  
Reg. No. 43,486  
Reg. No. 43,723  
Reg. No. 43,596  
Reg. No. 44,549  
Reg. No. 44,981  
Reg. No. 45,003  
Reg. No. 45,152  
Reg. No. 45,460  
Reg. No. 45,560  
Reg. No. 46,543  
Reg. No. 46,977  
Reg. No. 47,120  
Reg. No. P47,232

Patent Agents:

Brian A. Dietzel  
Kevin R. Imes

Reg. No. 44,656  
Reg. No. 44,795

all of the firm of Baker Botts L.L.P.

Send Correspondence To:  
Baker Botts L.L.P.  
2001 Ross Avenue  
Dallas, Texas 75201-2980

Direct Telephone Calls To:  
Harold E. Meier, Esq.  
at (214) 953-6650  
Atty. Docket No. 064751.0315

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of the sole inventor

William T. Jennings

Inventor's signature

  
\_\_\_\_\_

Date

9/22/2000  
\_\_\_\_\_

Residence (City, County, State)

Plano, Collin County, Texas

Citizenship

United States of America

Post Office Address

3504 Gary Drive  
Plano, Texas 75023